

03			
03 / 0100			
03 / 0200			
03 / 0300			
03 / 0400			
03 / 0500			
03 / 0600			
03 / 0700			
03 / 0800			
03 / 0900			
03 / 1000			
04			
04 / 0100			
04 / 0200			
04 / 0300			
04 / 0400			
04 / 0500			
04 / 0600			
04 / 0700			
04 / 0800			
04 / 0900			
04 / 1000			
04 / 1100			
04 / 1200			
04 / 1300			
04 / 1400			
04 / 1500			
04 / 1600			
04 / 1700			
04 / 1800			
04 / 1900			
04 / 2000			
05			
05 / 0100			
08			
08 / 0100			
08 / 0200			
08 / 0300			
08 / 0400			
08 / 0500			

470.9 kNm (48.0 mt)
 (347320 ft.lbs)

 16800 kg
 (37040 lbs)

 21.0 m
 (68' 11")

 25.2 m
 (82' 8")

 32.5 m
 (106' 8")

 endlos
 endless
 sans finite

 PK 50002-EH A – C
 39.2 kNm (4.0 mt)
 (28910 ft.lbs)

 PK 50002-EH A – G
 54.0 kNm (5.5 mt)
 (39830 ft.lbs)




 35.0 MPa (350 bar)
 (5075 psi)



 80 – 100 l/min
 (21.1 – 26.4 US gal./min)

	HYA	2(A)	3(B)	4(C)	5(D)	6(E)	7(F)	8(G)
		7.7 m (25' 3")	9.7 m (31' 10")	11.8 m (38' 9")	14.1 m (46' 3")	16.4 m (53' 10")	18.7 m (61' 4")	21.0 m (68' 11")
+V1								23.2 m (76' 1")
+V2								25.2 m (82' 8")

	4145 kg (9138 lbs)	4410 kg (9722 lbs)	4685 kg (10328 lbs)	5000 kg (11023 lbs)	5225 kg (11519 lbs)	5425 kg (11960 lbs)	5605 kg (12357 lbs)
+2/4	4225 kg (9314 lbs)	4500 kg (9921 lbs)	4805 kg (10593 lbs)	5130 kg (11310 lbs)	5375 kg (11850 lbs)	5585 kg (12313 lbs)	5785 kg (12754 lbs)
+V1							5658 kg (12474 lbs)
+V2							5698 kg (12562 lbs)




	KT180 180 l (47.6 US gal.)	KT250 250 l (66.0 US gal.)	KT300 300 l (79.3 US gal.)	KT350 350 l (92.5 US gal.)	STZY	2GETR PK 50002-EH A – C
	90 kg (198 lbs)	100 kg (220 lbs)	105 kg (231 kg)	115 kg (254 lbs)	100 kg (220 lbs)	60 kg (132 lbs)

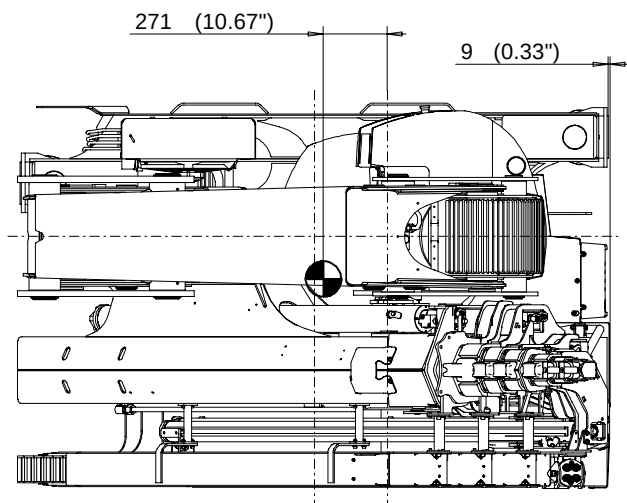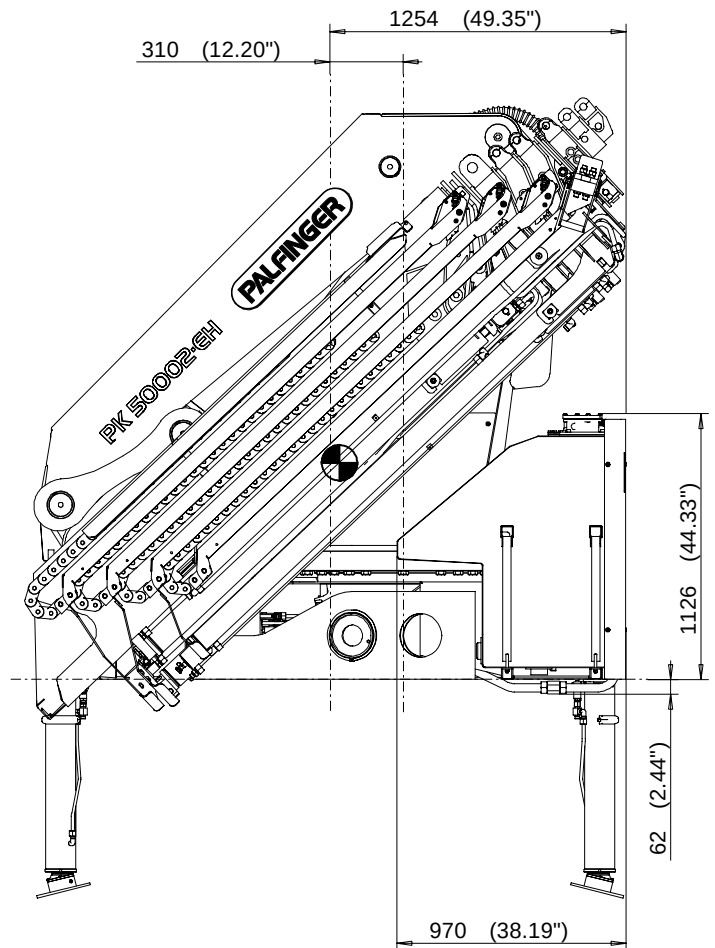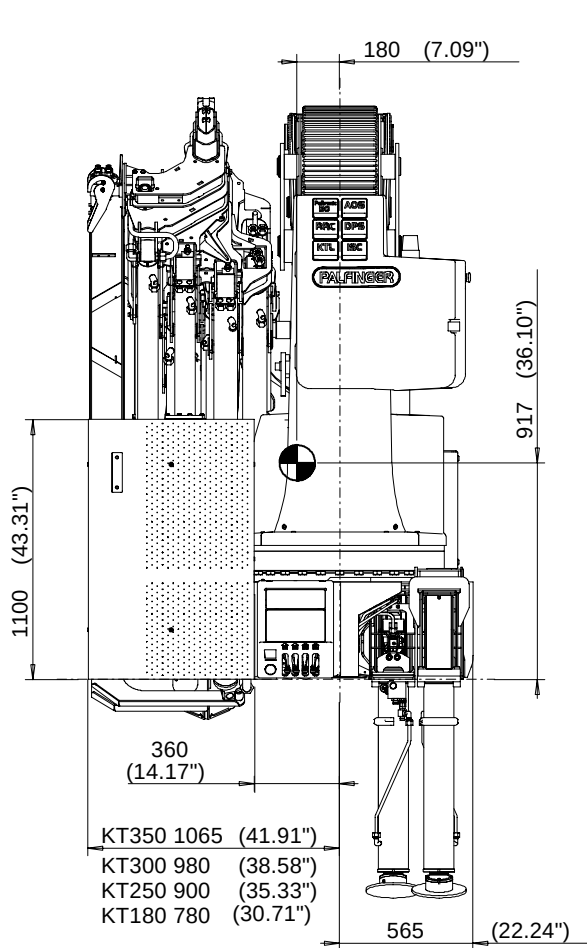

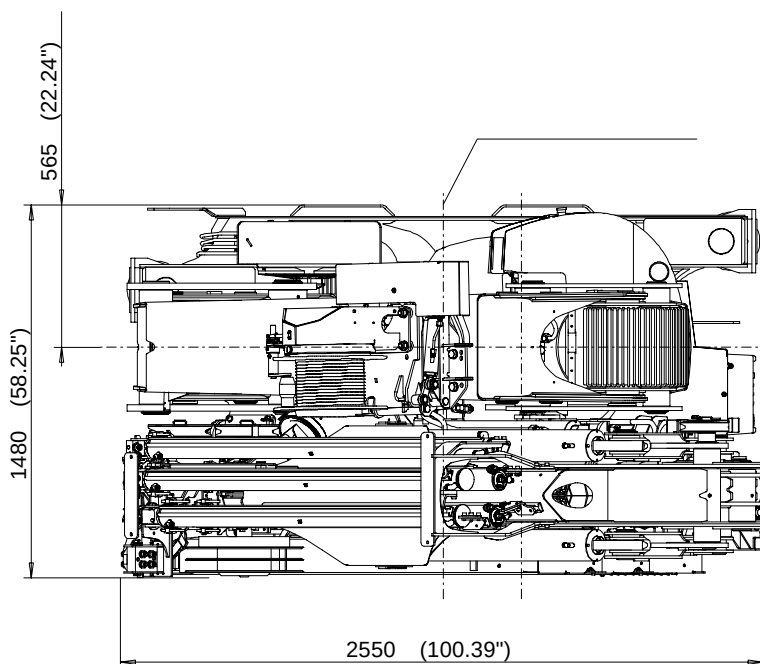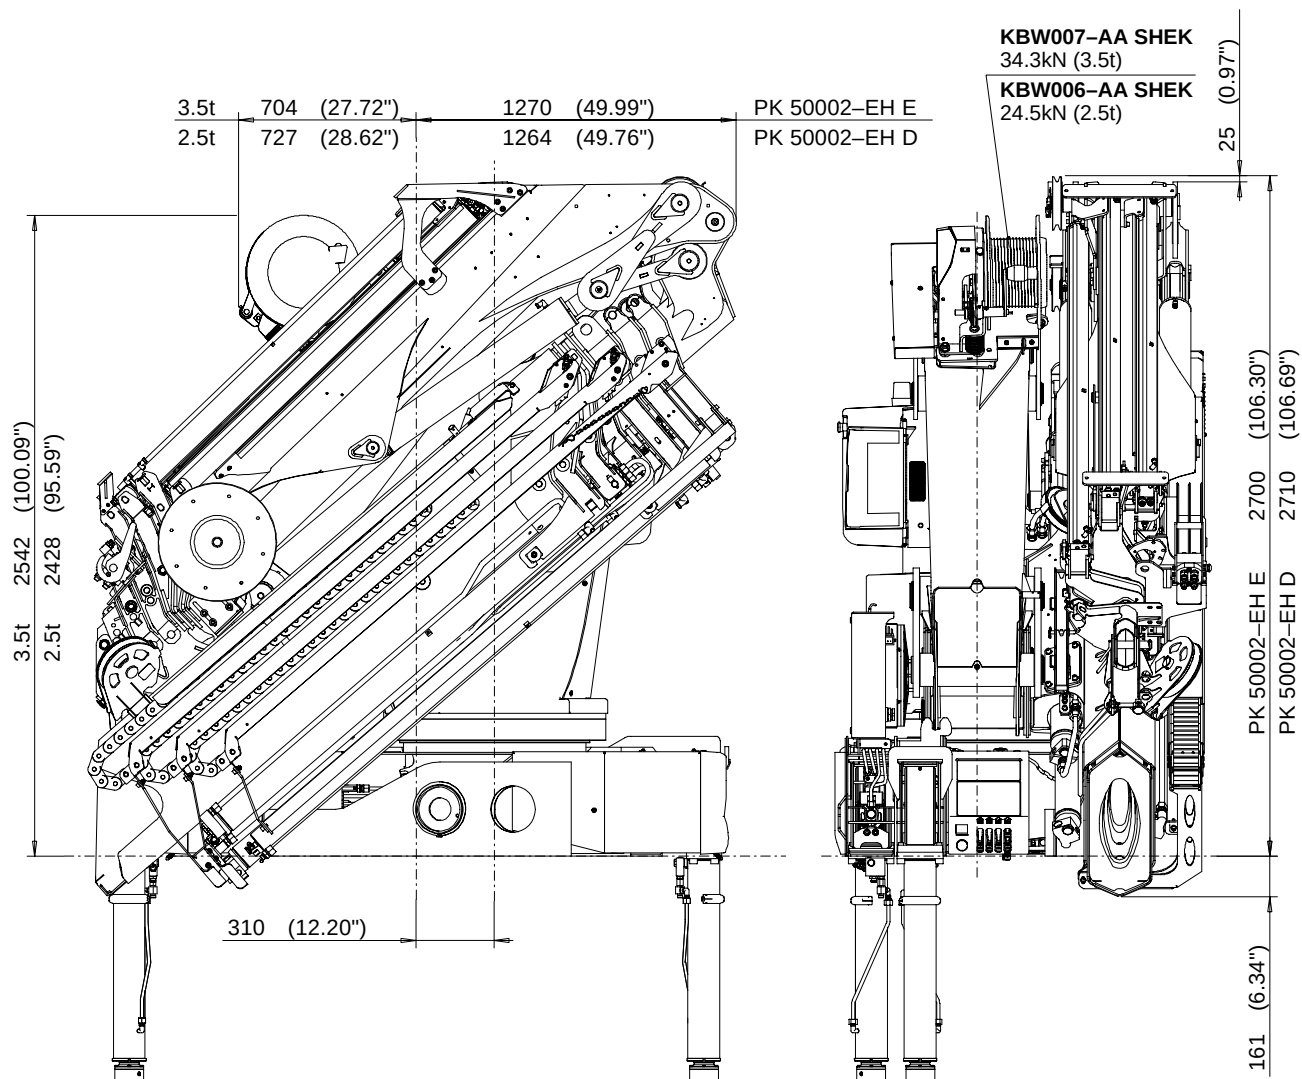


PK 50002-EH D,E 4 NK R3X STZS3 2GTR

PK 50002-EH D PJ 125 C	6187 kg (13640 lbs)
PK 50002-EH D PJ 125 E	6399 kg (14107 lbs)
PK 50002-EH D PJ 125 EJV1	6427 kg (14169 lbs)
PK 50002-EH E PJ 125 C	6432 kg (14180 lbs)
PK 50002-EH E PJ 125 E	6644 kg (14647 lbs)
PK 50002-EH E PJ 125 EJV1	6672 kg (14709 lbs)
+2/4 PJ 125	55 kg (121 lbs)

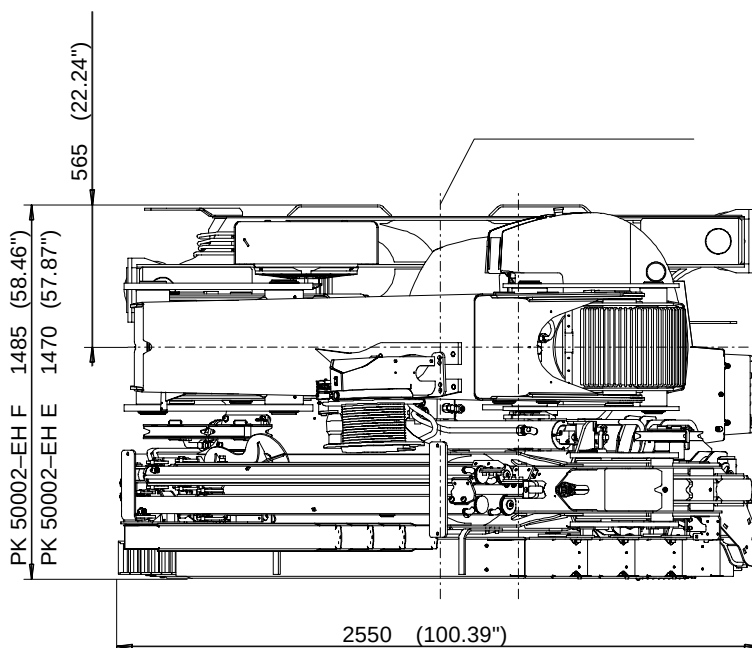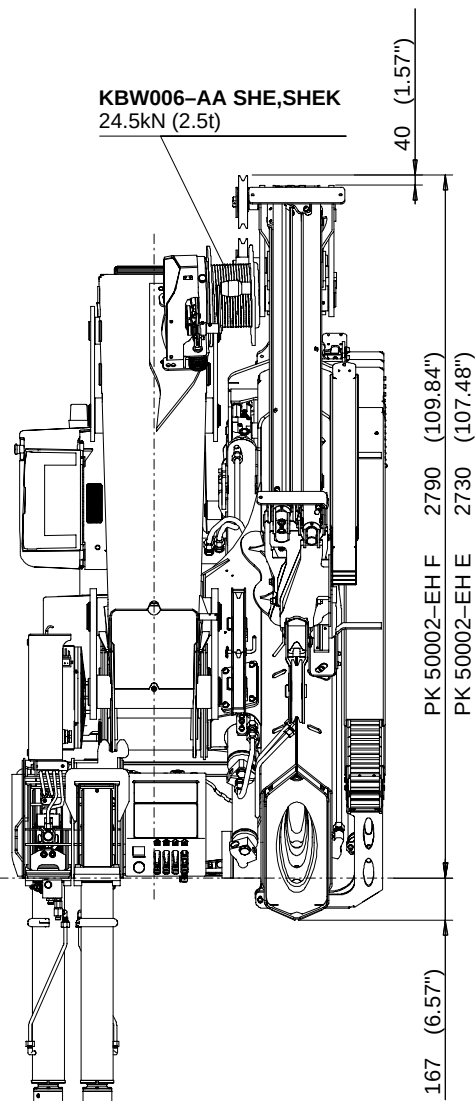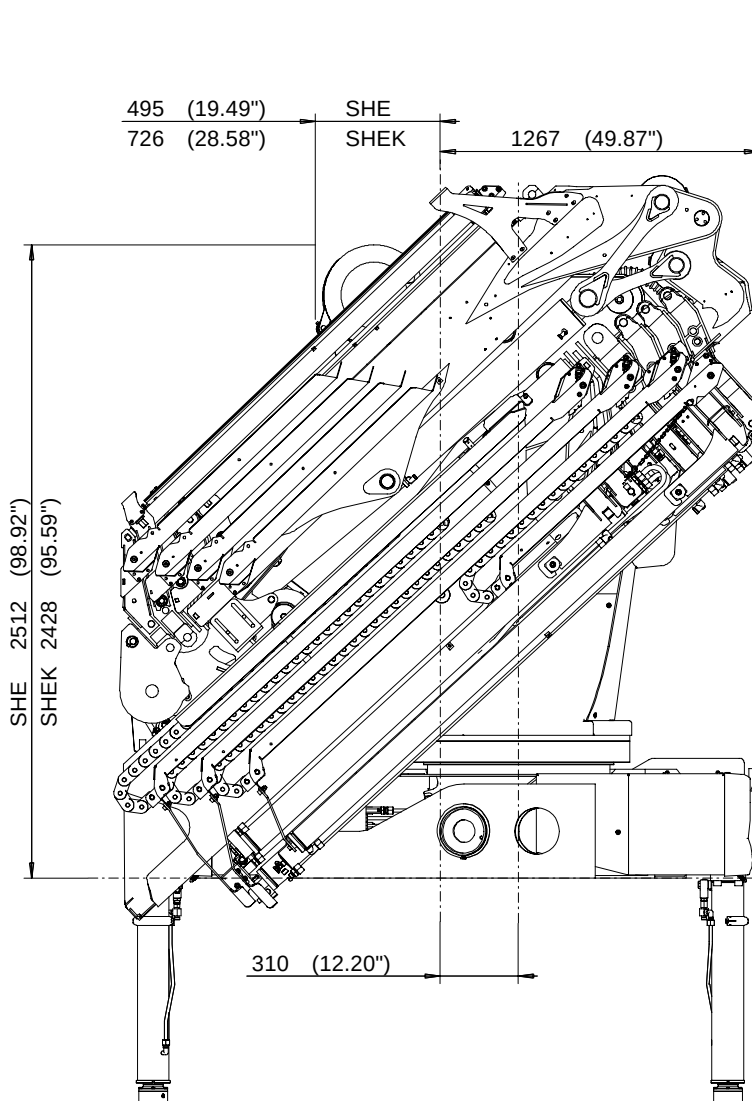

PK 50002-EH E,F 4 NK R3X STZS3 2GTR


PK 50002-EH E PJ 080 B	6092 kg (13430 lbs)	
PK 50002-EH E PJ 080 C	6185 kg (13635 lbs)	
PK 50002-EH E PJ 080 CJV2	6242 kg (13761 lbs)	
PK 50002-EH F PJ 080 B	6296 kg (13880 lbs)	
PK 50002-EH F PJ 080 C	6389 kg (14085 lbs)	
PK 50002-EH F PJ 080 CJV2	6446 kg (14211 lbs)	
+2/4 PJ 080 B,C	55 kg (121 lbs)	65 kg (143 lbs)

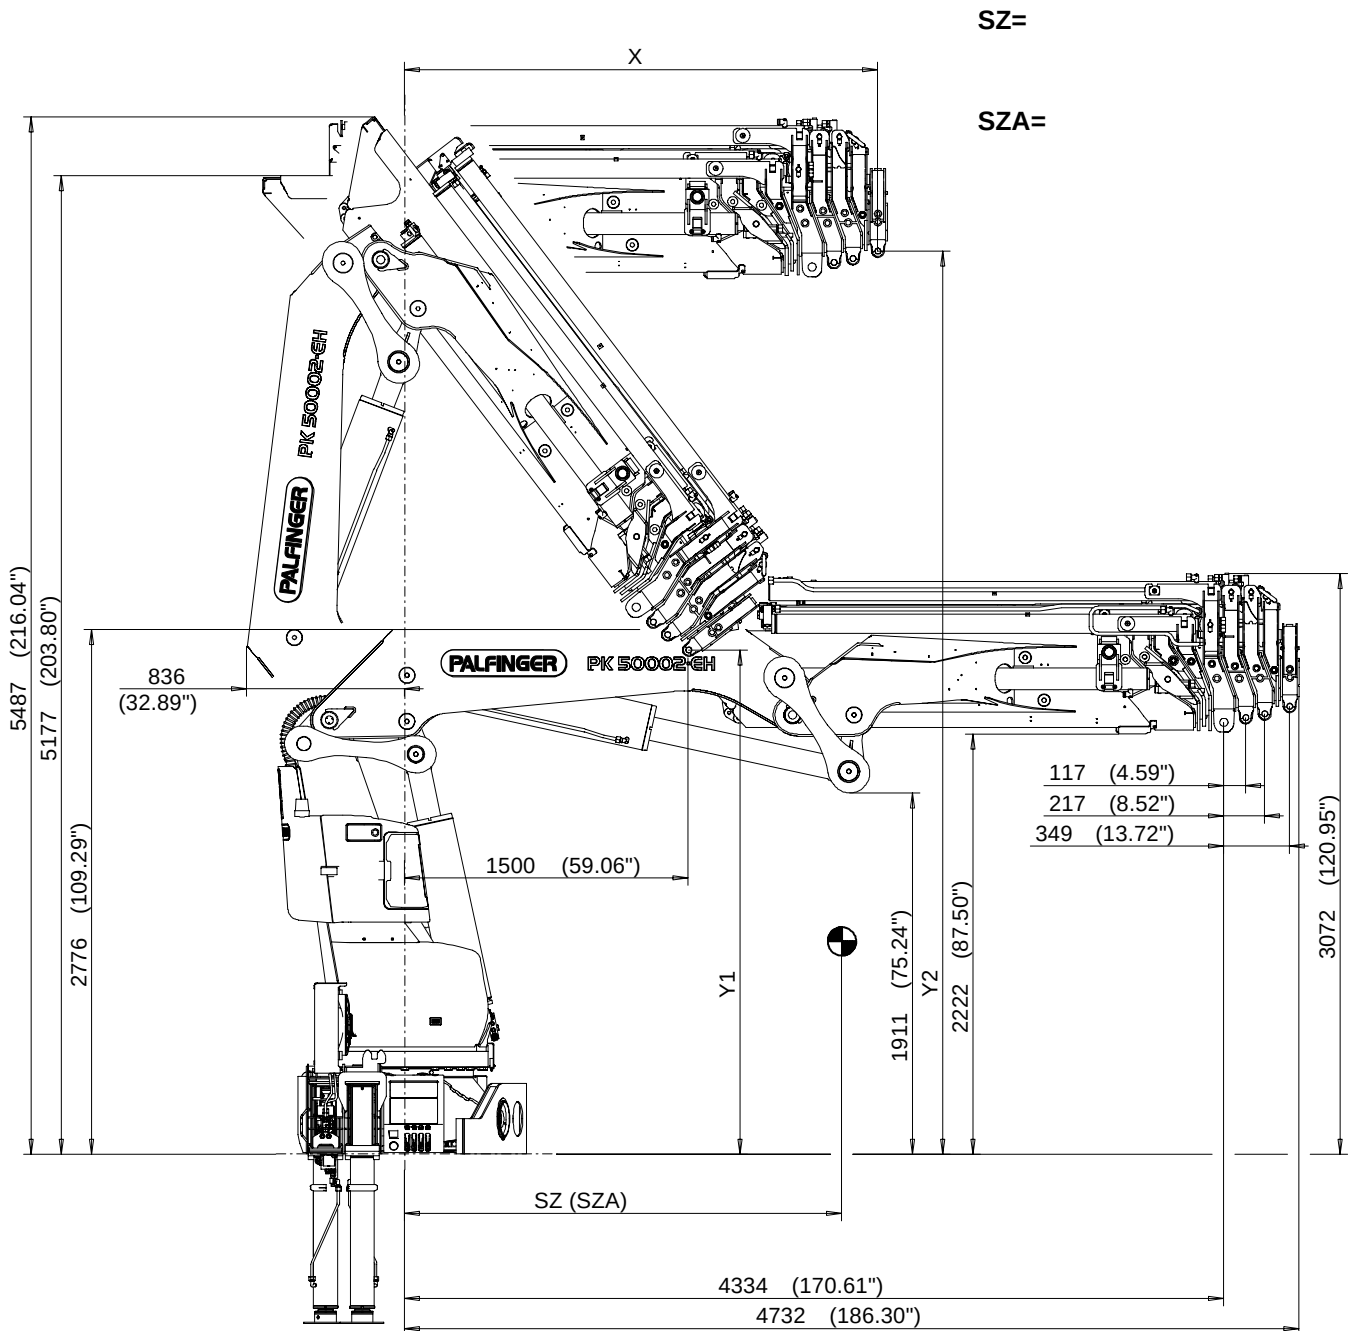



	2(A)	3(B)	4(C)	5(D)	6(E)	7(F)	8(G)
X	2096 mm (82.52")	2129 mm (83.82")	2156 mm (84.88")	2273 mm (89.49")	2373 mm (93.43")	2474 mm (97.40")	2505 mm (98.62")
Y1	3214 mm (126.54")	3165 mm (124.61")	3128 mm (123.15")	2964 mm (116.69")	2833 mm (111.54")	2700 mm (106.30")	2660 mm (104.72")
Y2	4651 mm (183.11")	4671 mm (183.90")	4689 mm (184.61")	4716 mm (185.67")	4733 mm (186.34")	4749 mm (186.97")	4770 mm (187.80")
SZ	780 mm (30.71")	912 mm (35.91")	1038 mm (40.87")	1129 mm (44.45")	1219 mm (47.99")	1295 mm (50.98")	1361 mm (53.58")
SZA	1085 mm (42.72")	1501 mm (59.09")	2005 mm (78.94")	2502 mm (98.50")	3026 mm (119.13")	3535 mm (139.17")	4033 mm (158.78")

SZ=

SZA=

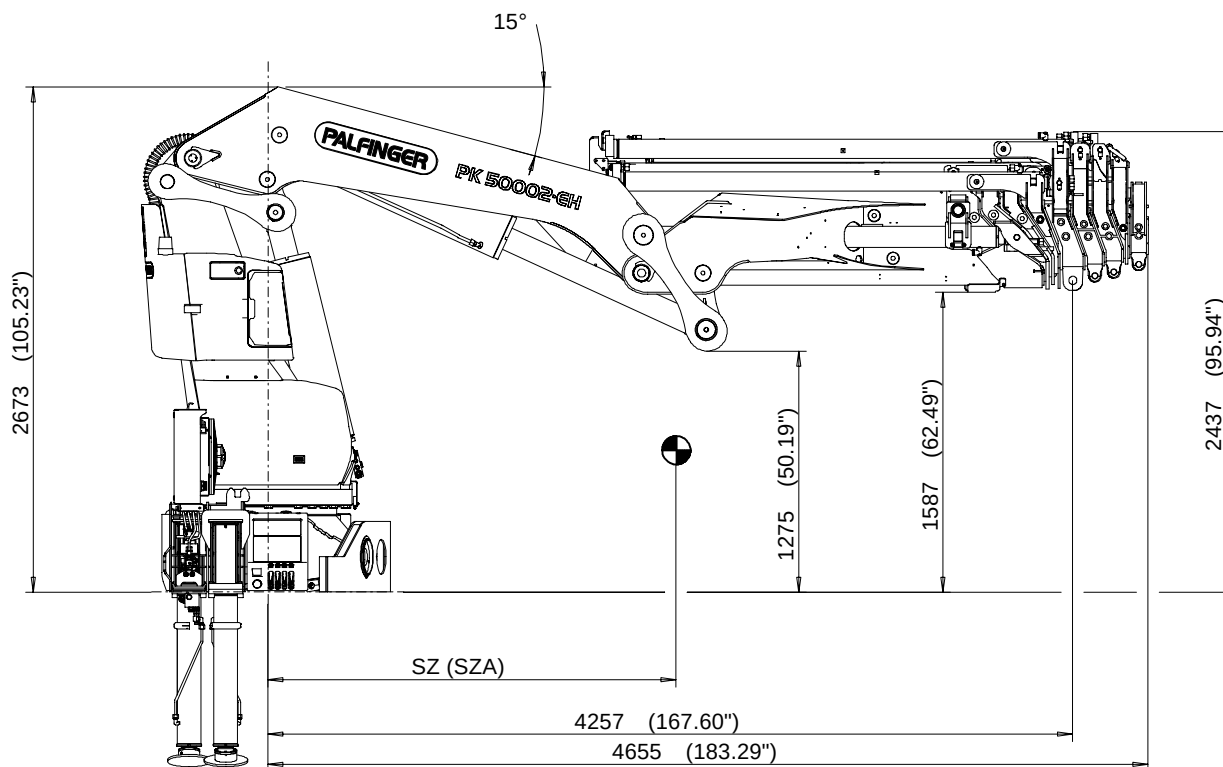


	2(A)	3(B)	4(C)	5(D)	6(E)	7(F)	8(G)
SZ	761 mm (29.96")	890 mm (35.04")	1013 mm (39.88")	1101 mm (43.35")	1189 mm (46.81")	1263 mm (49.72")	1328 mm (52.28")
SZA	1066 mm (41.97")	1478 mm (58.19")	1979 mm (77.91")	2475 mm (97.44")	2996 mm (117.95")	3503 mm (137.91")	4000 mm (157.48")

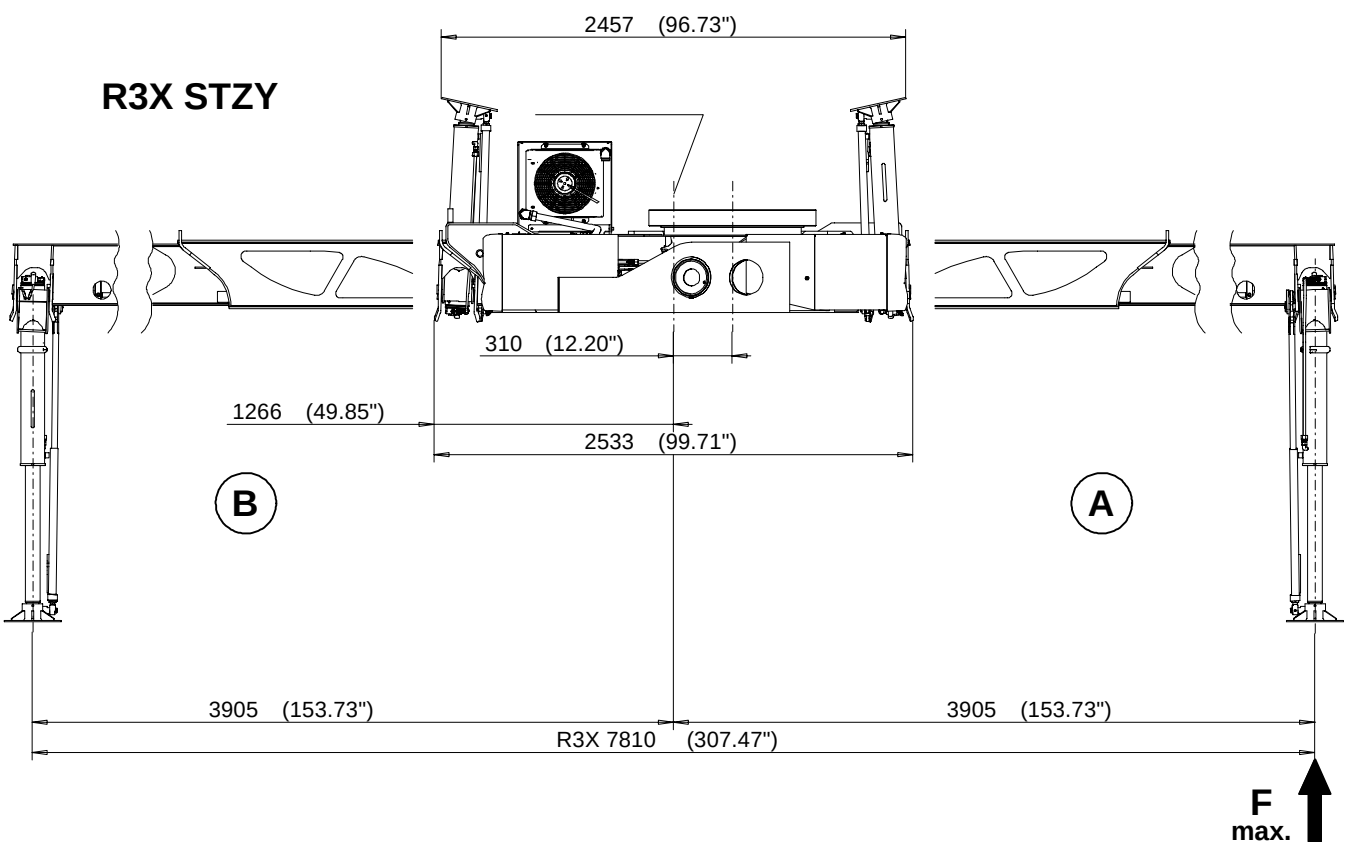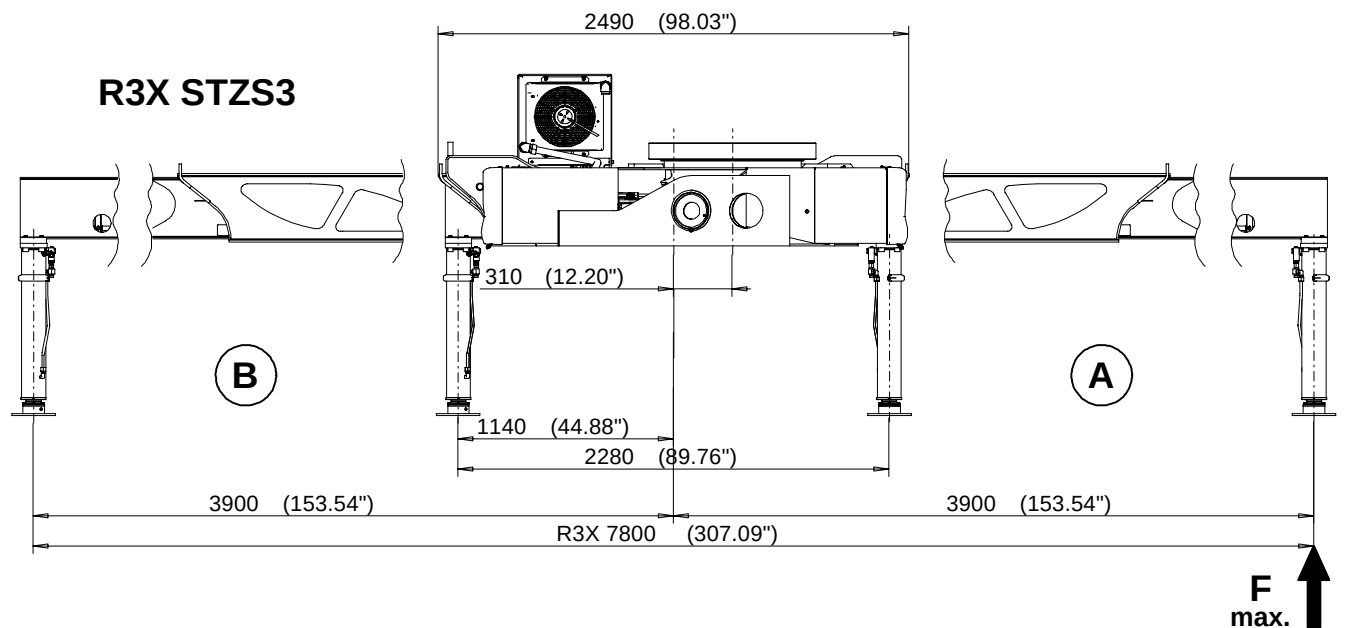


	STZS3	STZS-STÜ03	STZY	STZY-STÜ01	F max. A	F max. B
LKW	1340 kg (2954 lbs)	1330 kg (2932 lbs)	1440 kg (3175 lbs)	1420 kg (3131 lbs)	158.0 kN (35510 lbs)	149.0 kN (33480 lbs)


STZS3

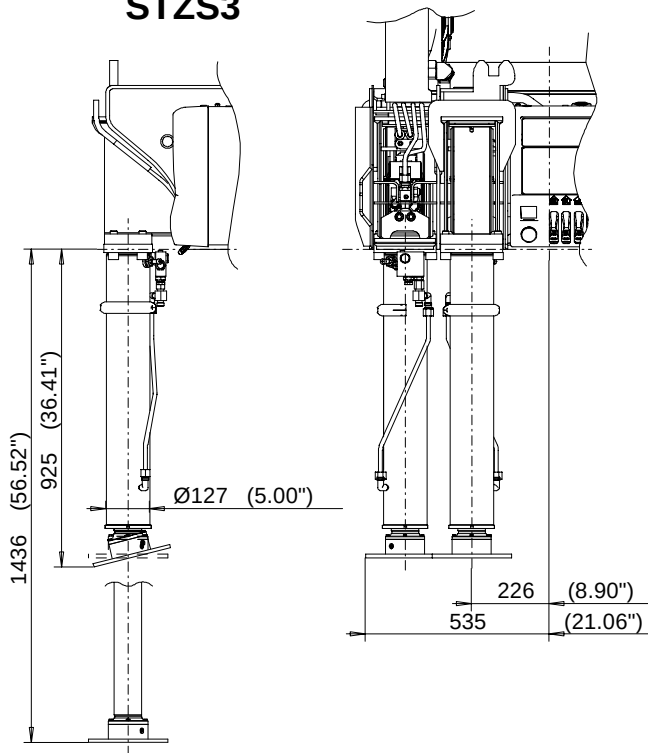


STÜ03

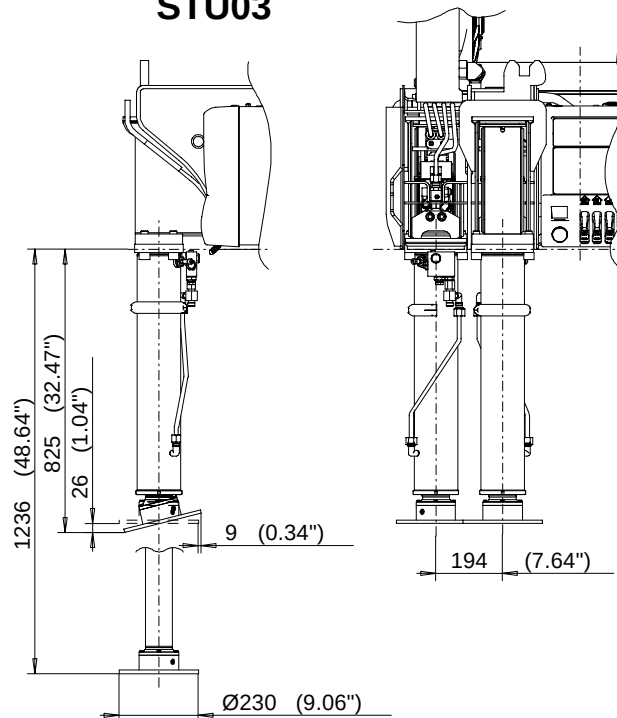




STZY

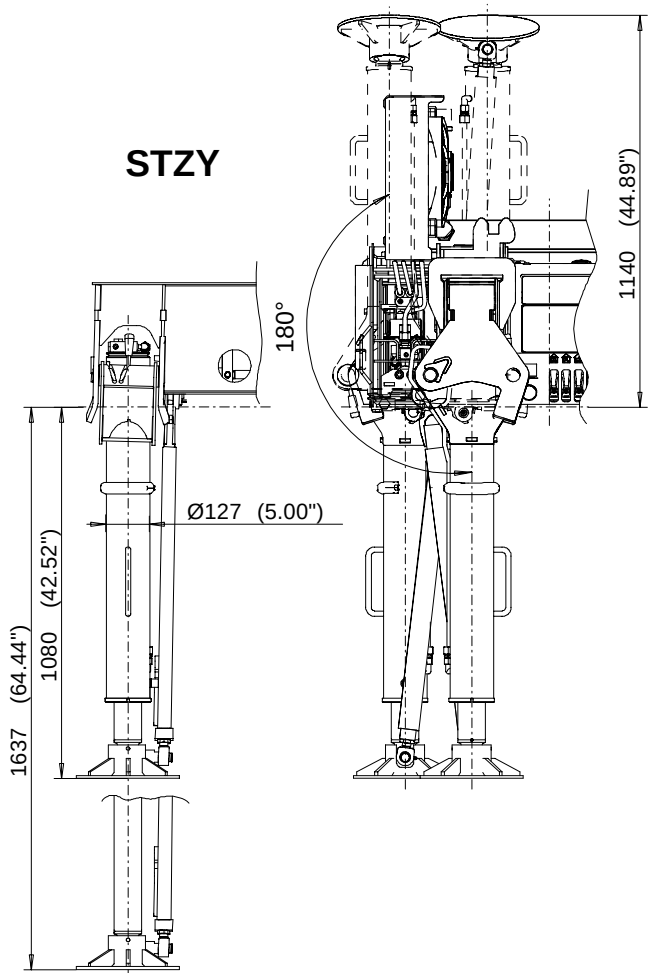


STÜ01

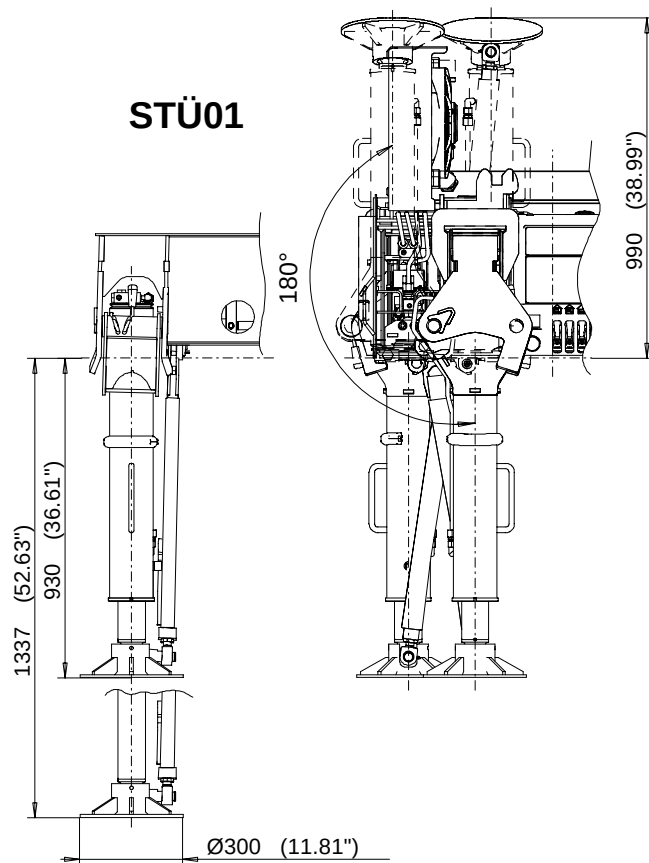



Konstruktionsänderungen vorbehalten, fertigungstechn. Toleranzen müssen berücksichtigt werden.
Subject to change, production tolerances have to be taken into account.
Sous réserve de modifications de conception. Les tolérances relatives à la technique de production doivent être prises en considération.

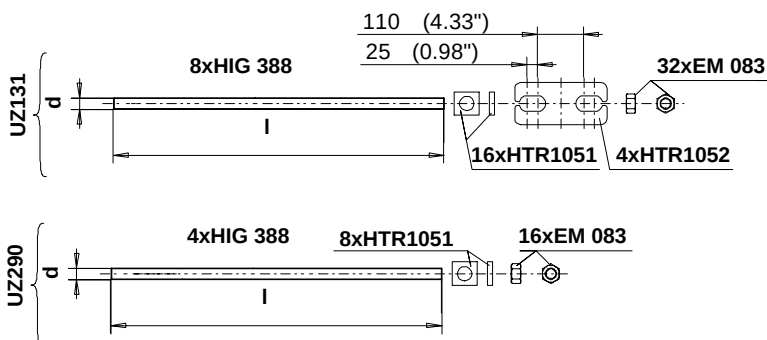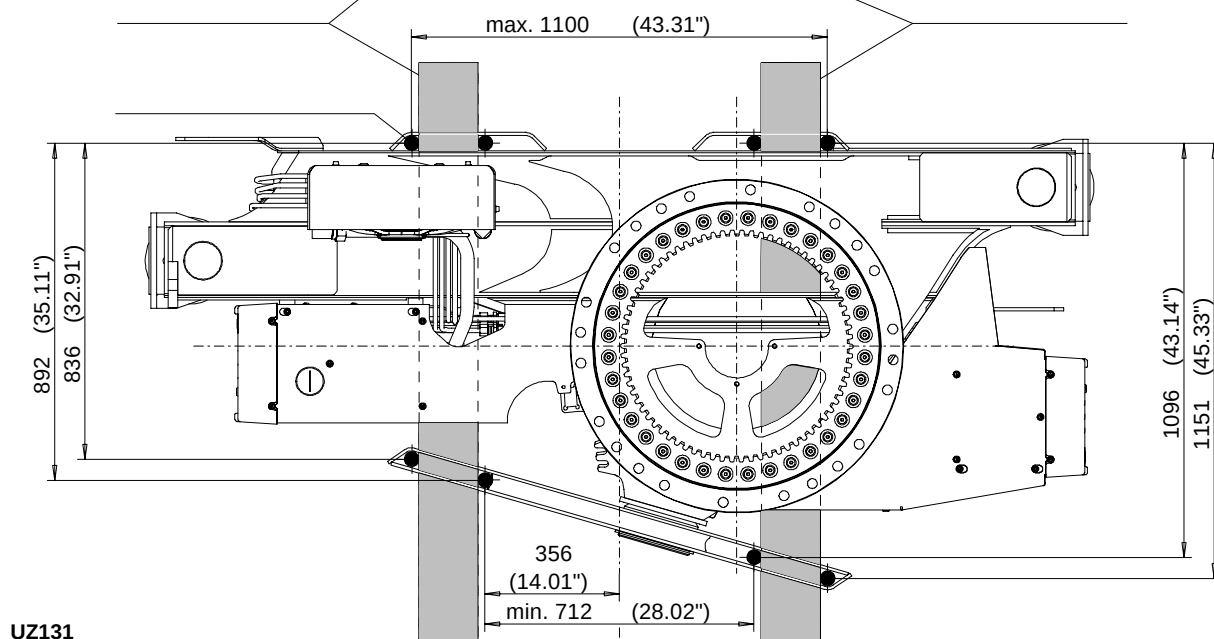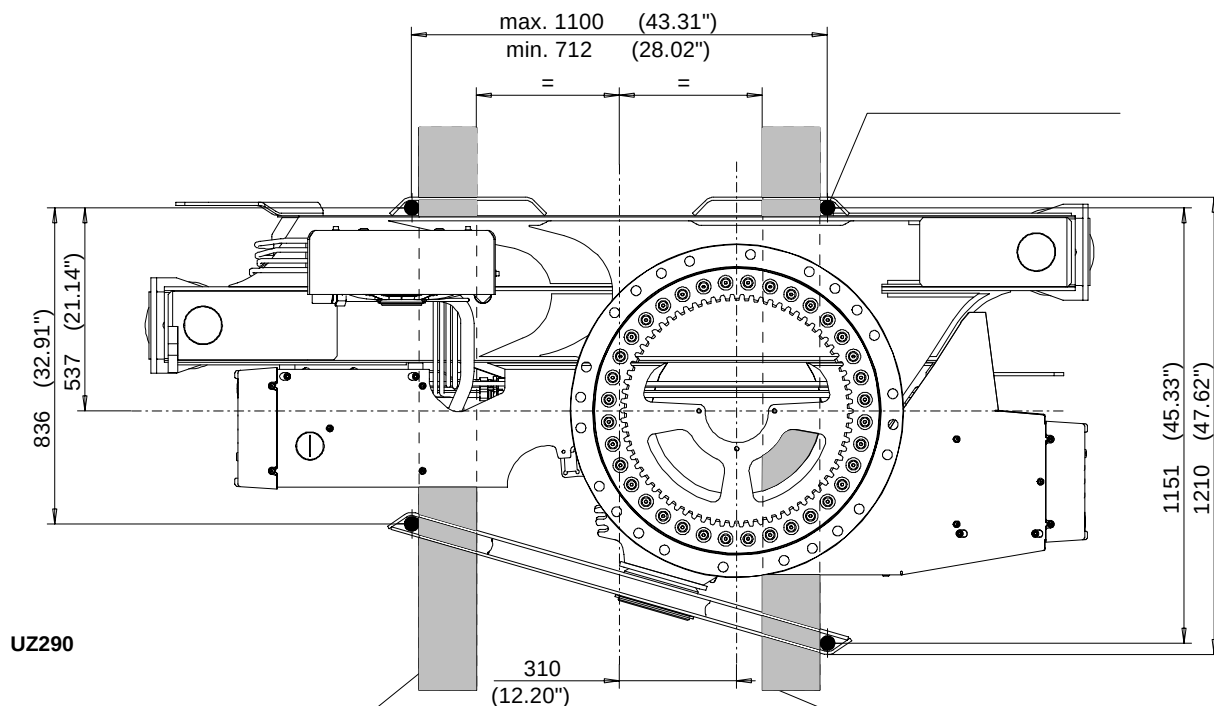



	d	l		
HIG 388	M36x1.5	1450 mm (57.09")	42 Cr Mo 4 V	1550 Nm

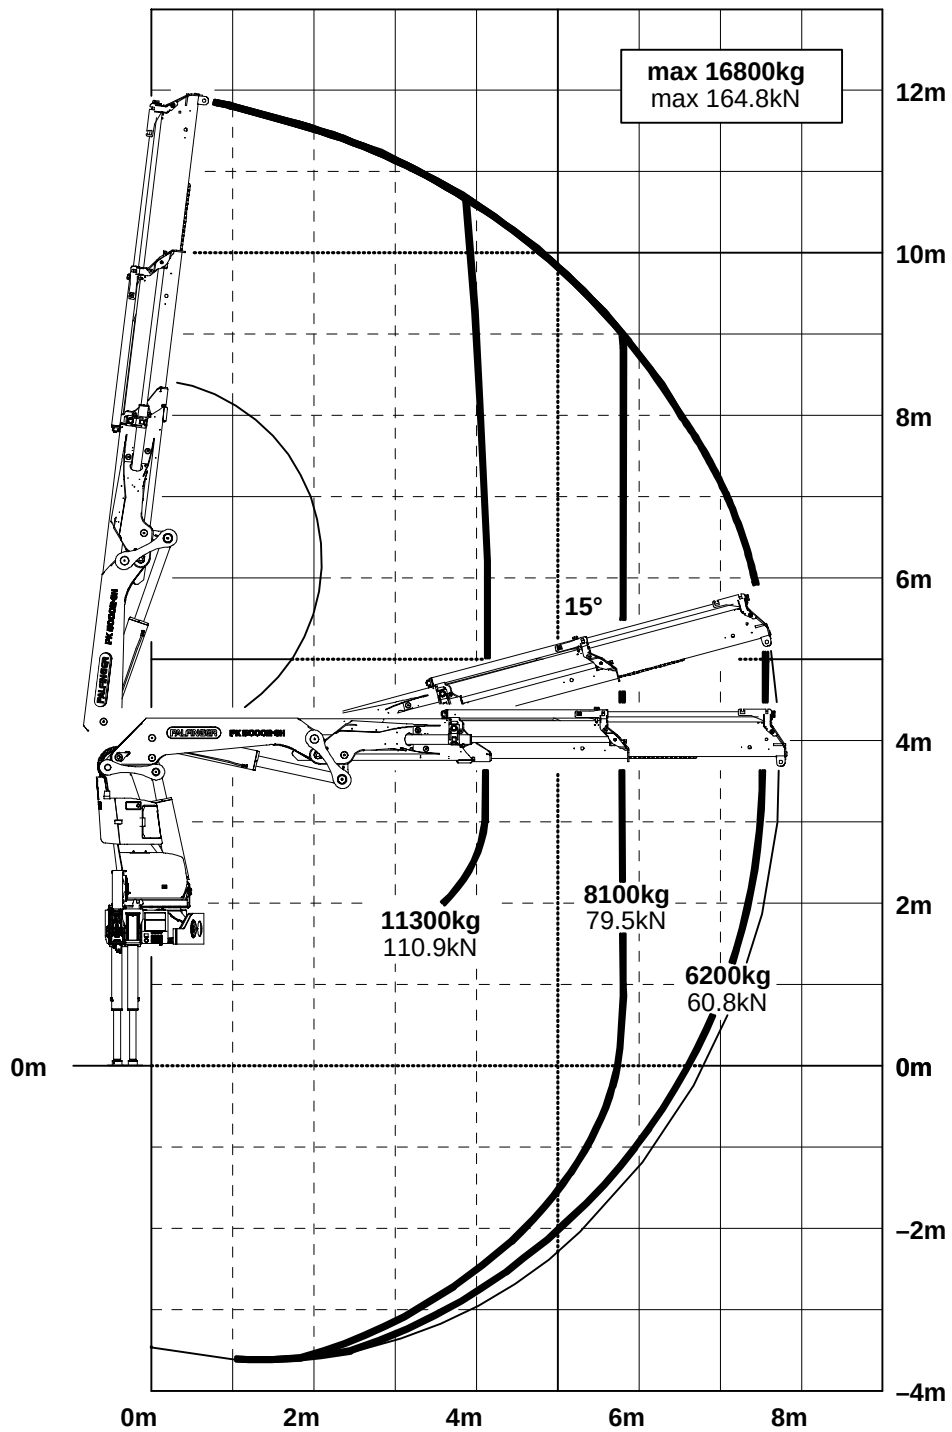


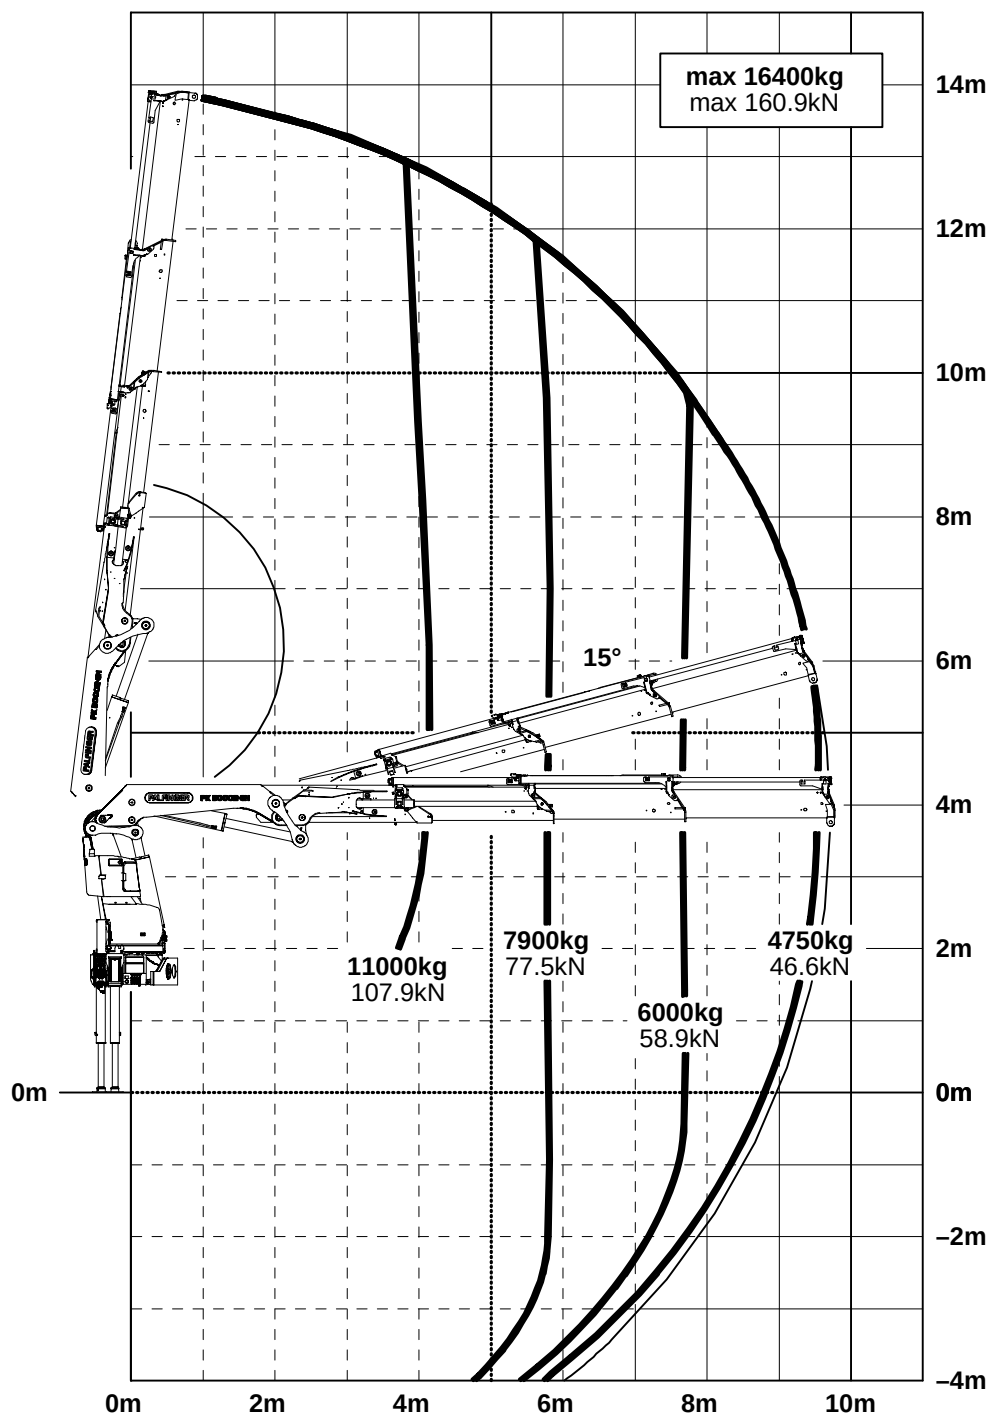



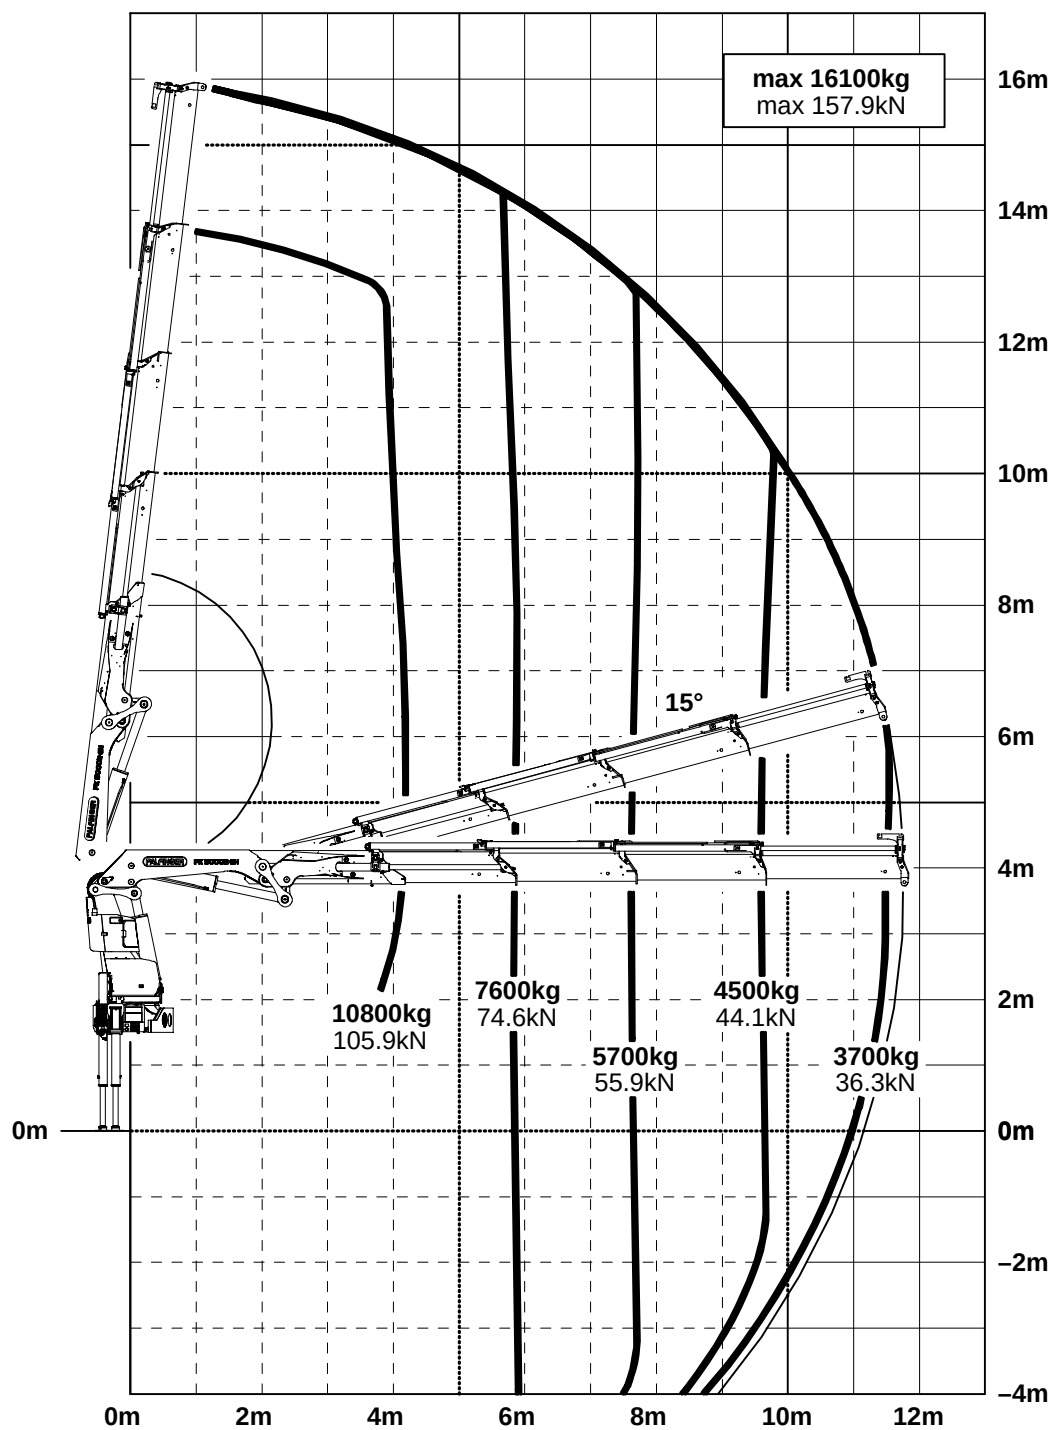


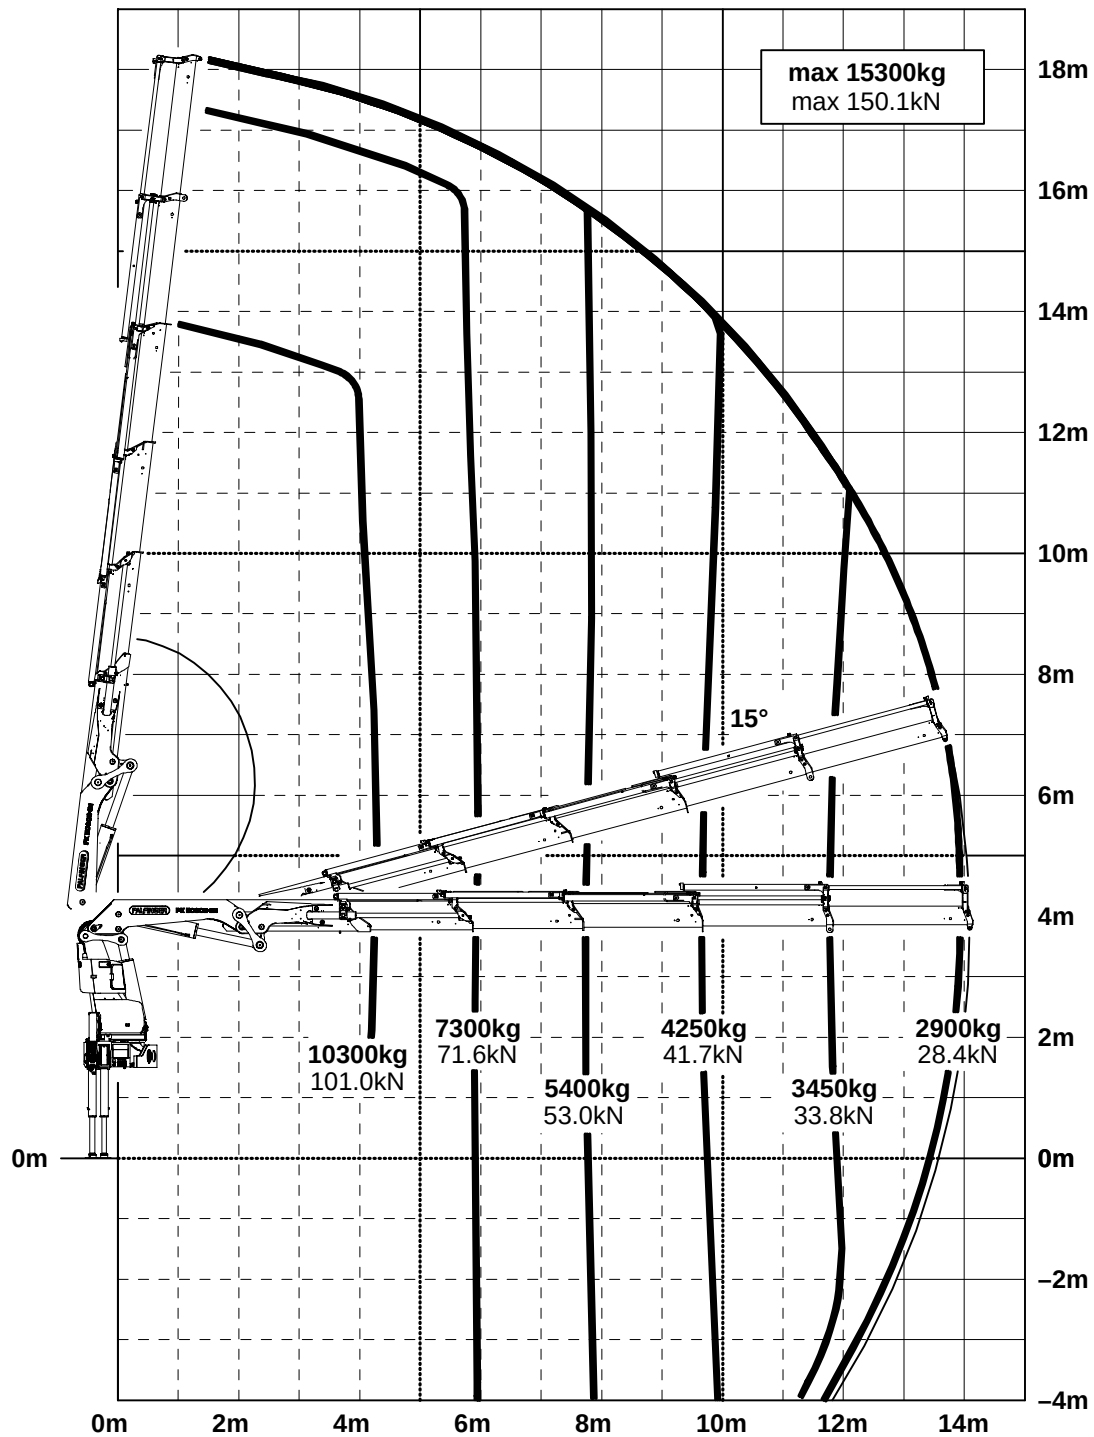


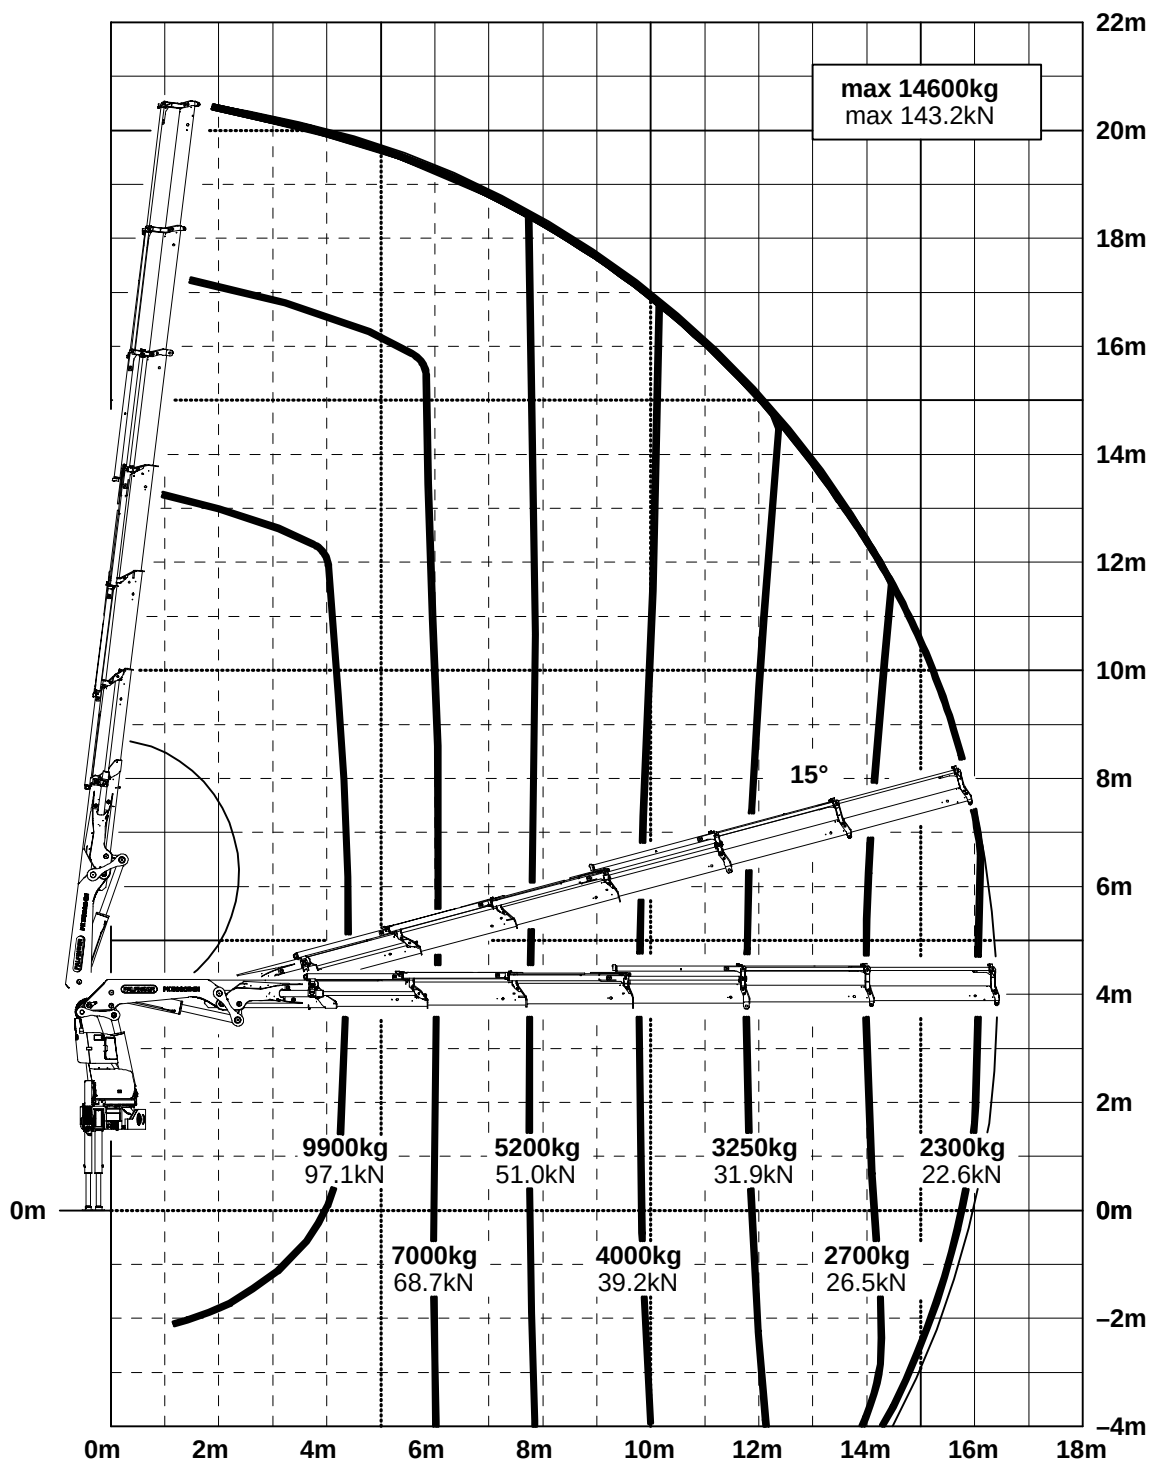


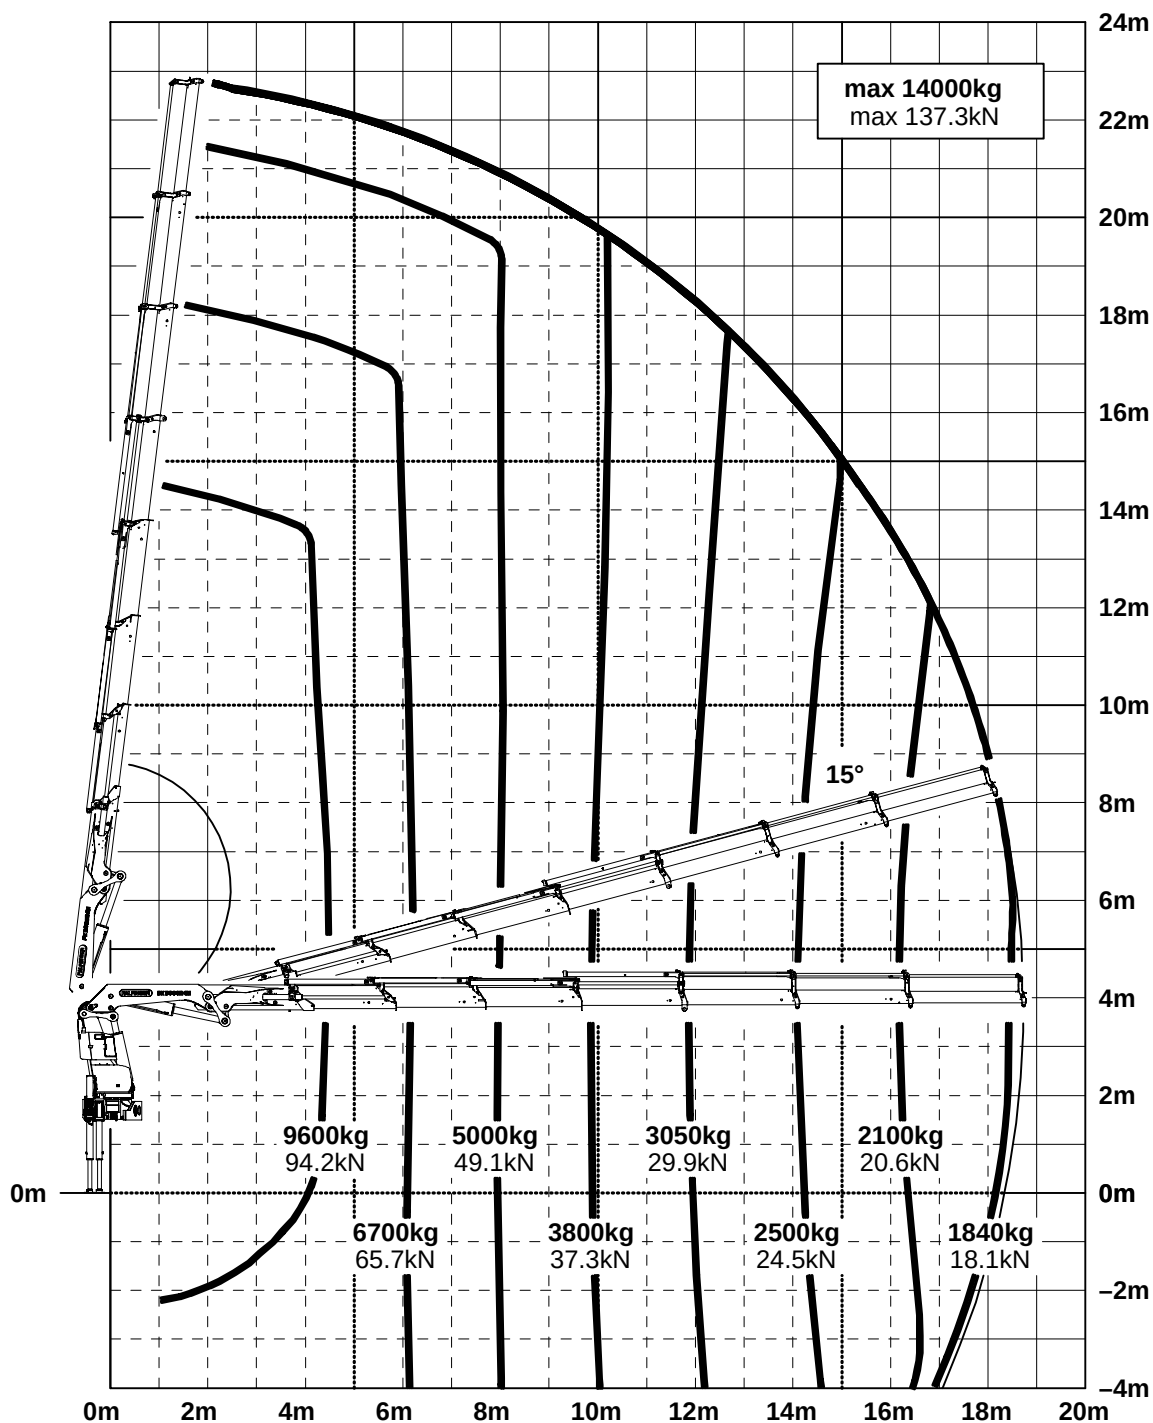


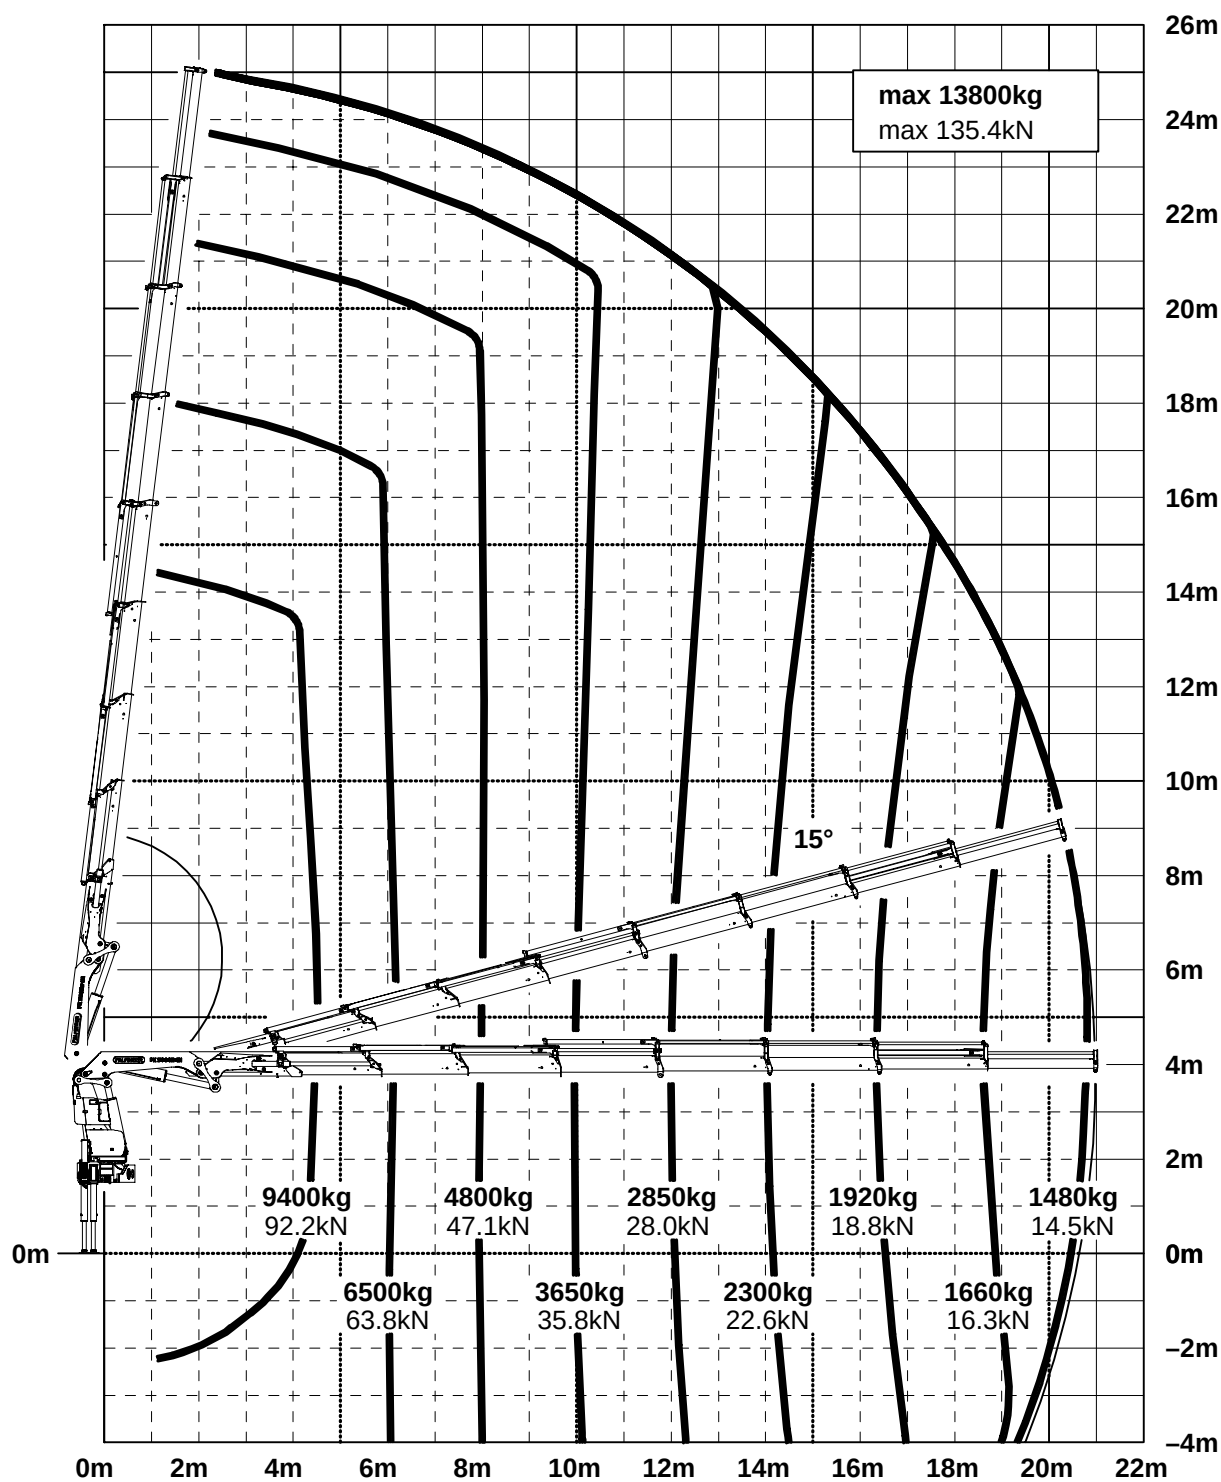


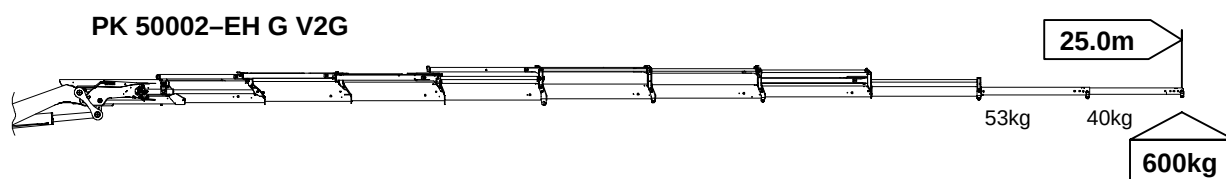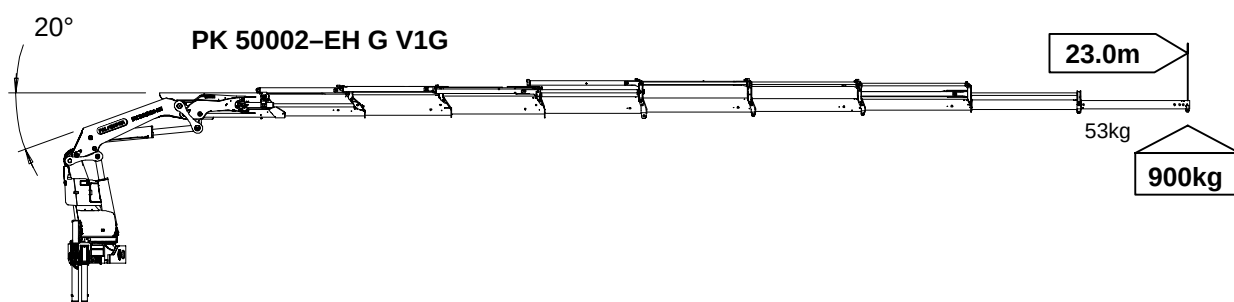


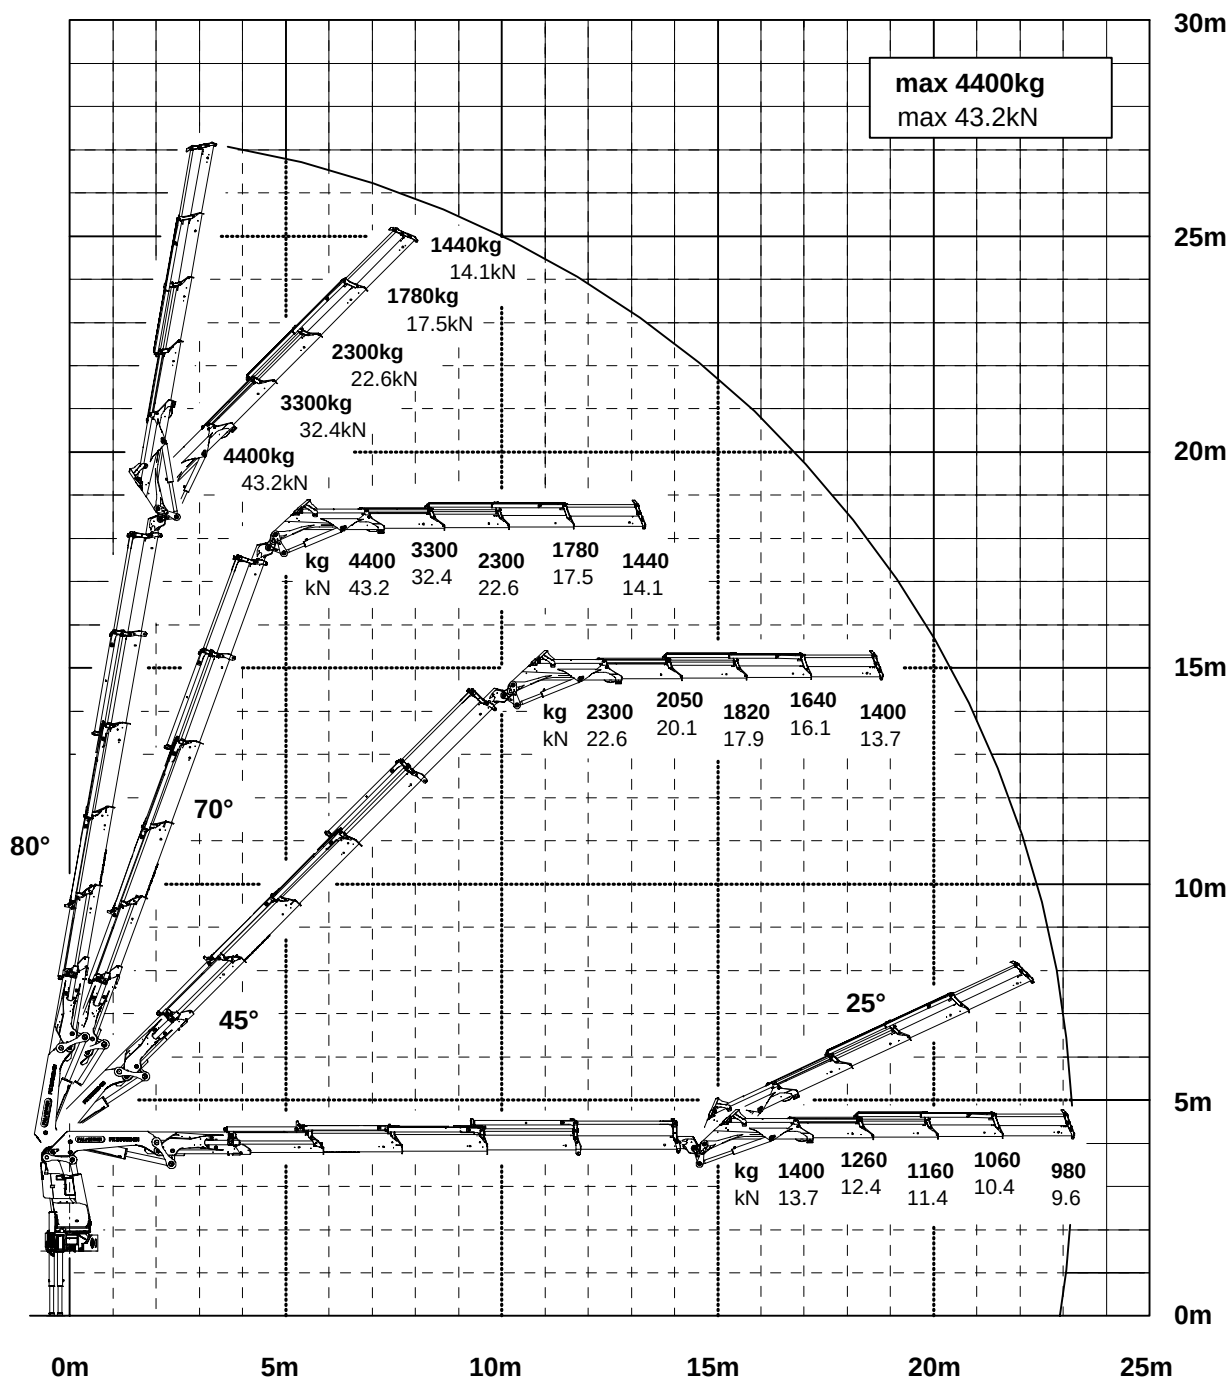

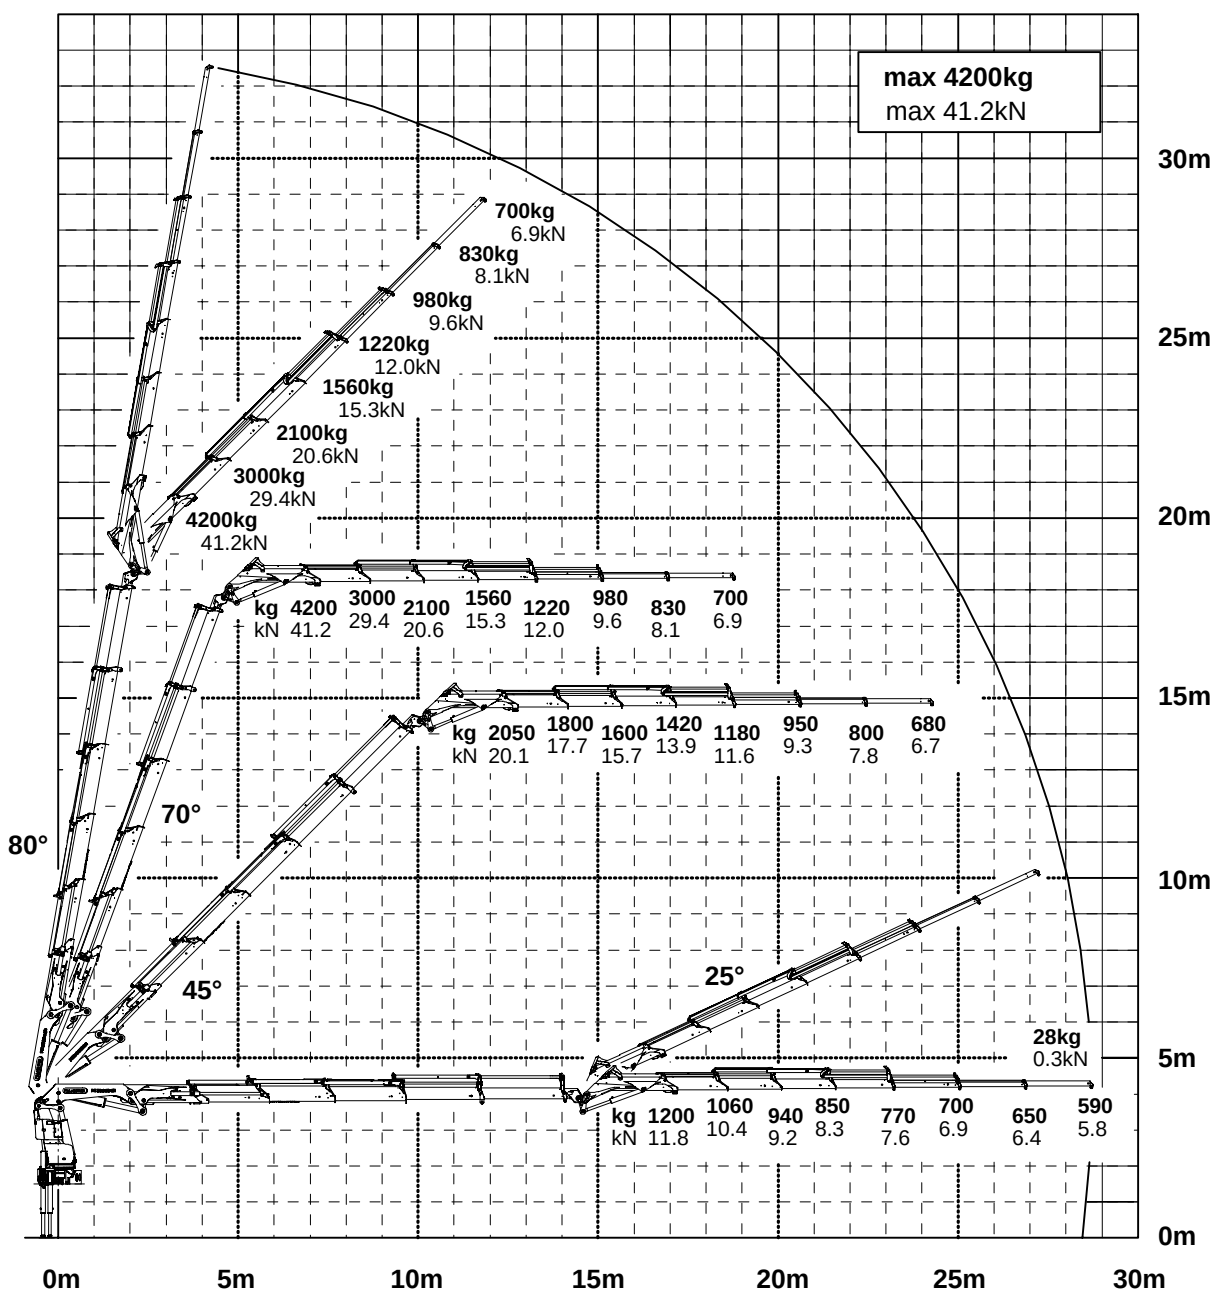

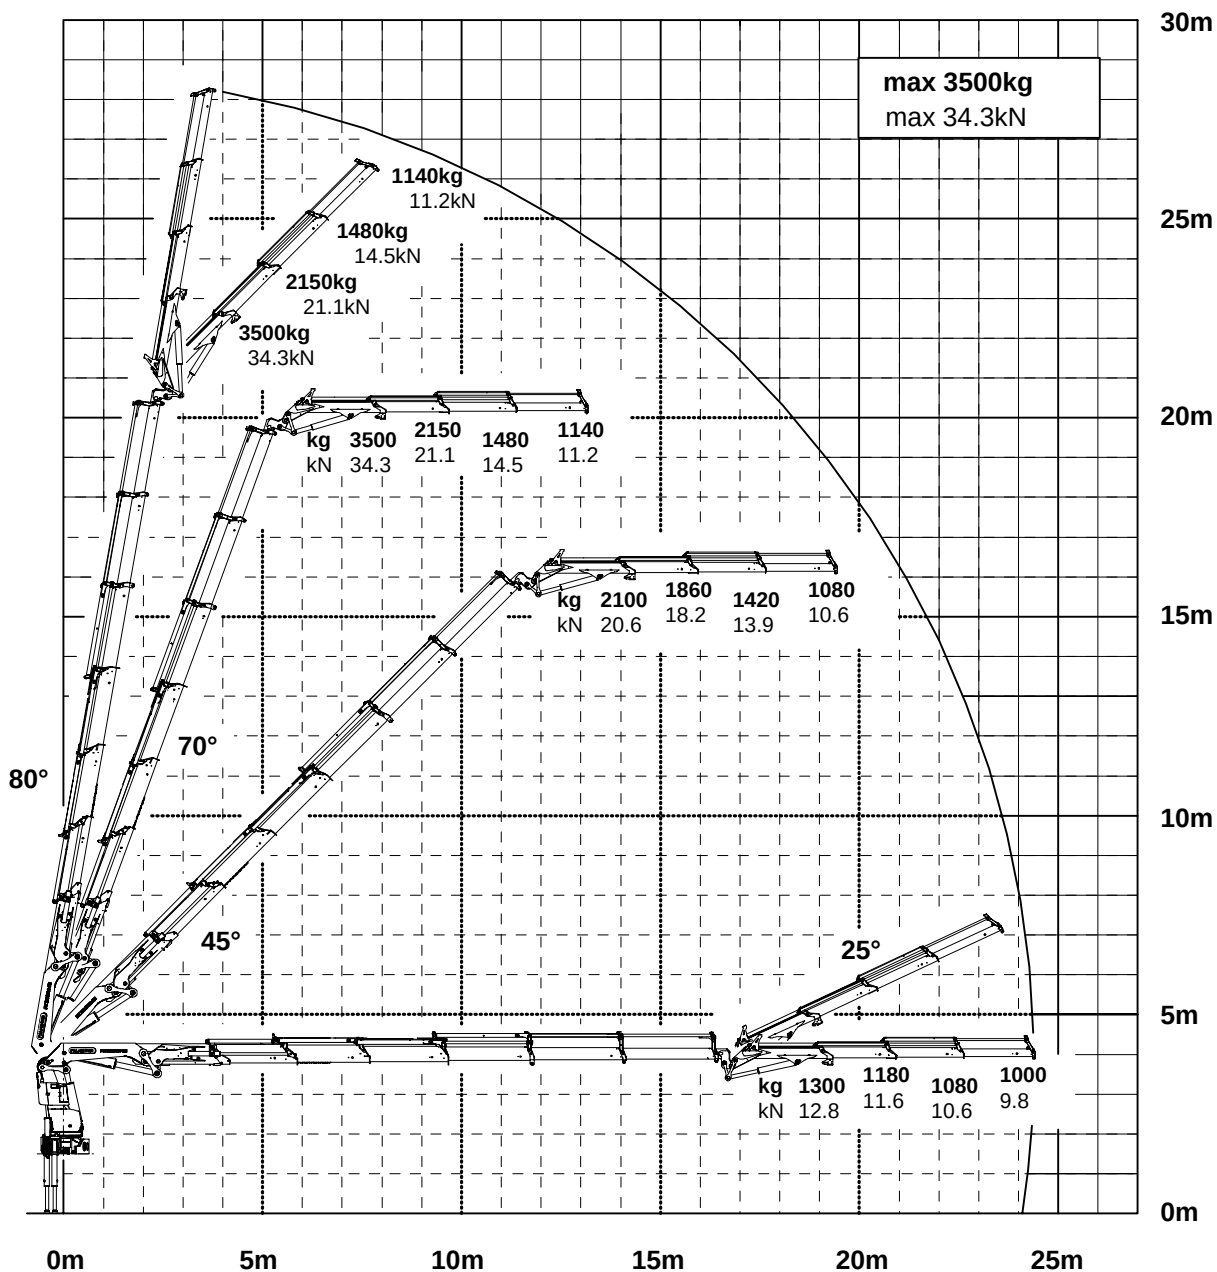


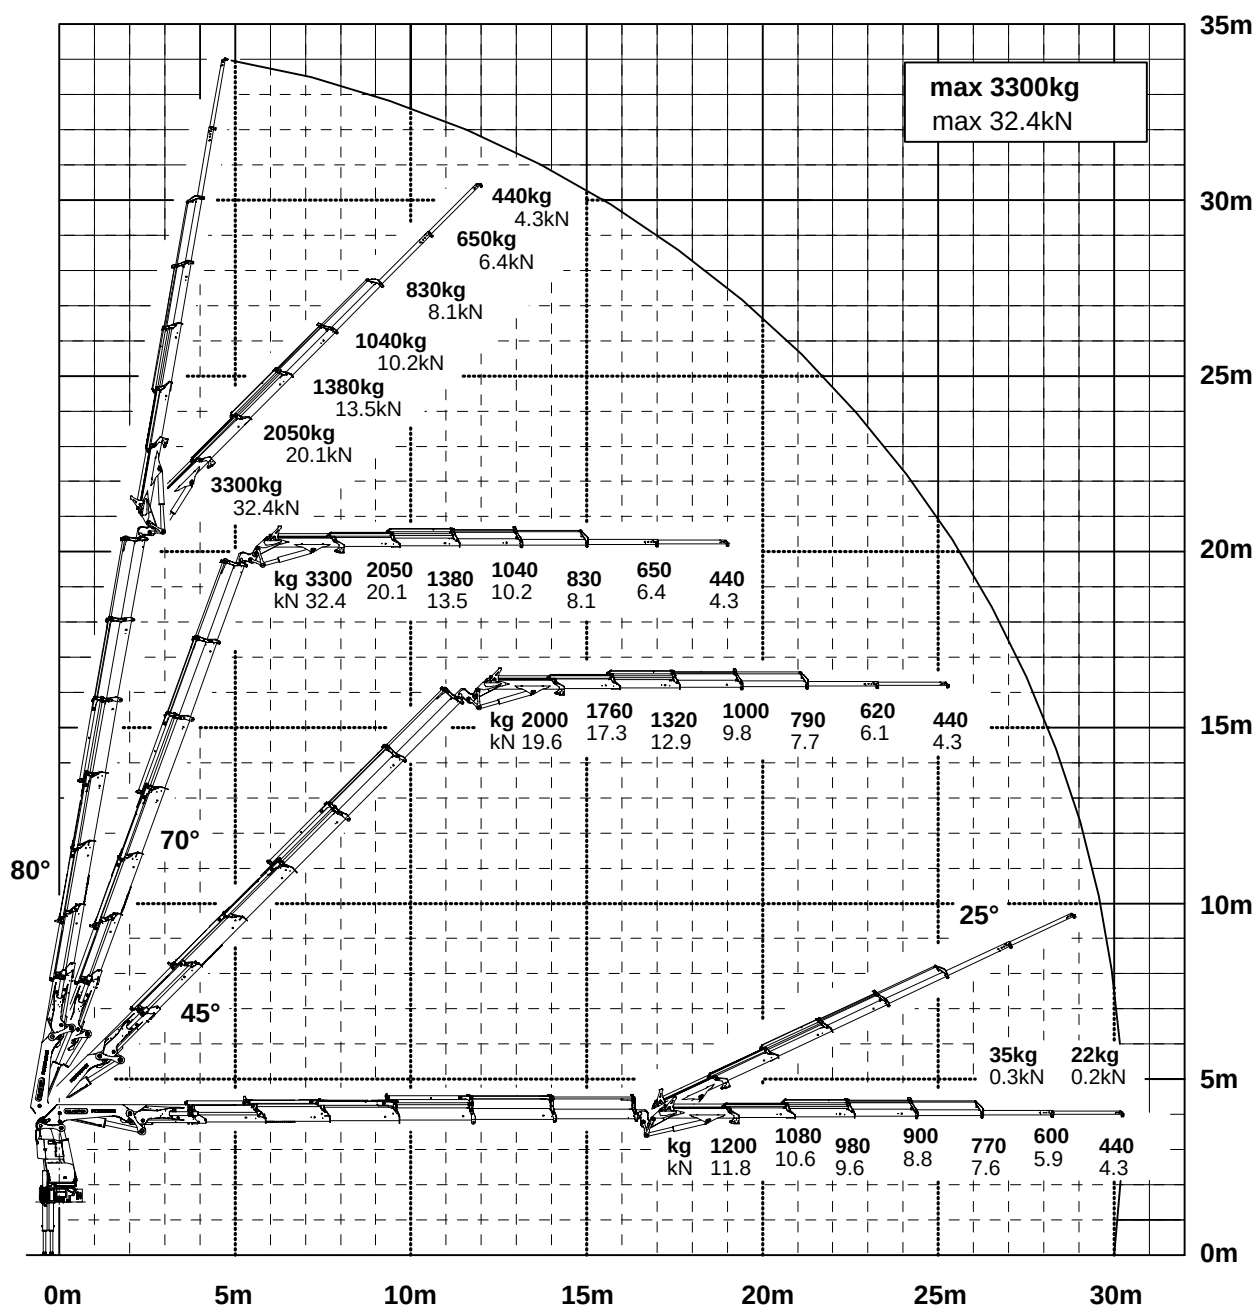


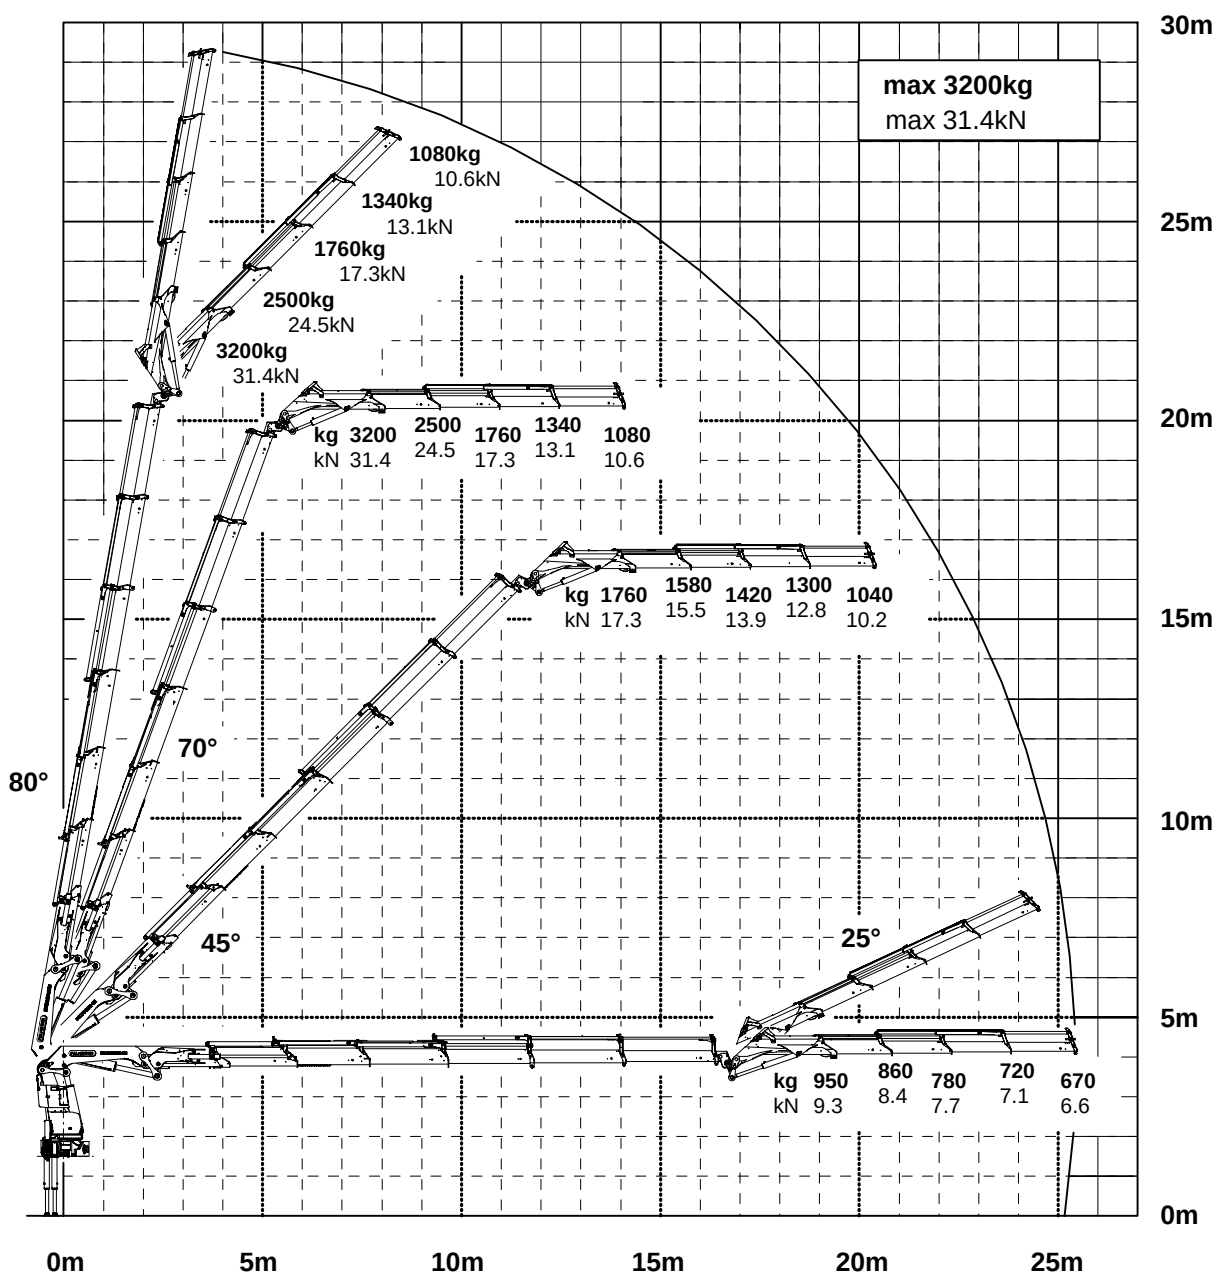

DPS^{plus}


Dual Power System

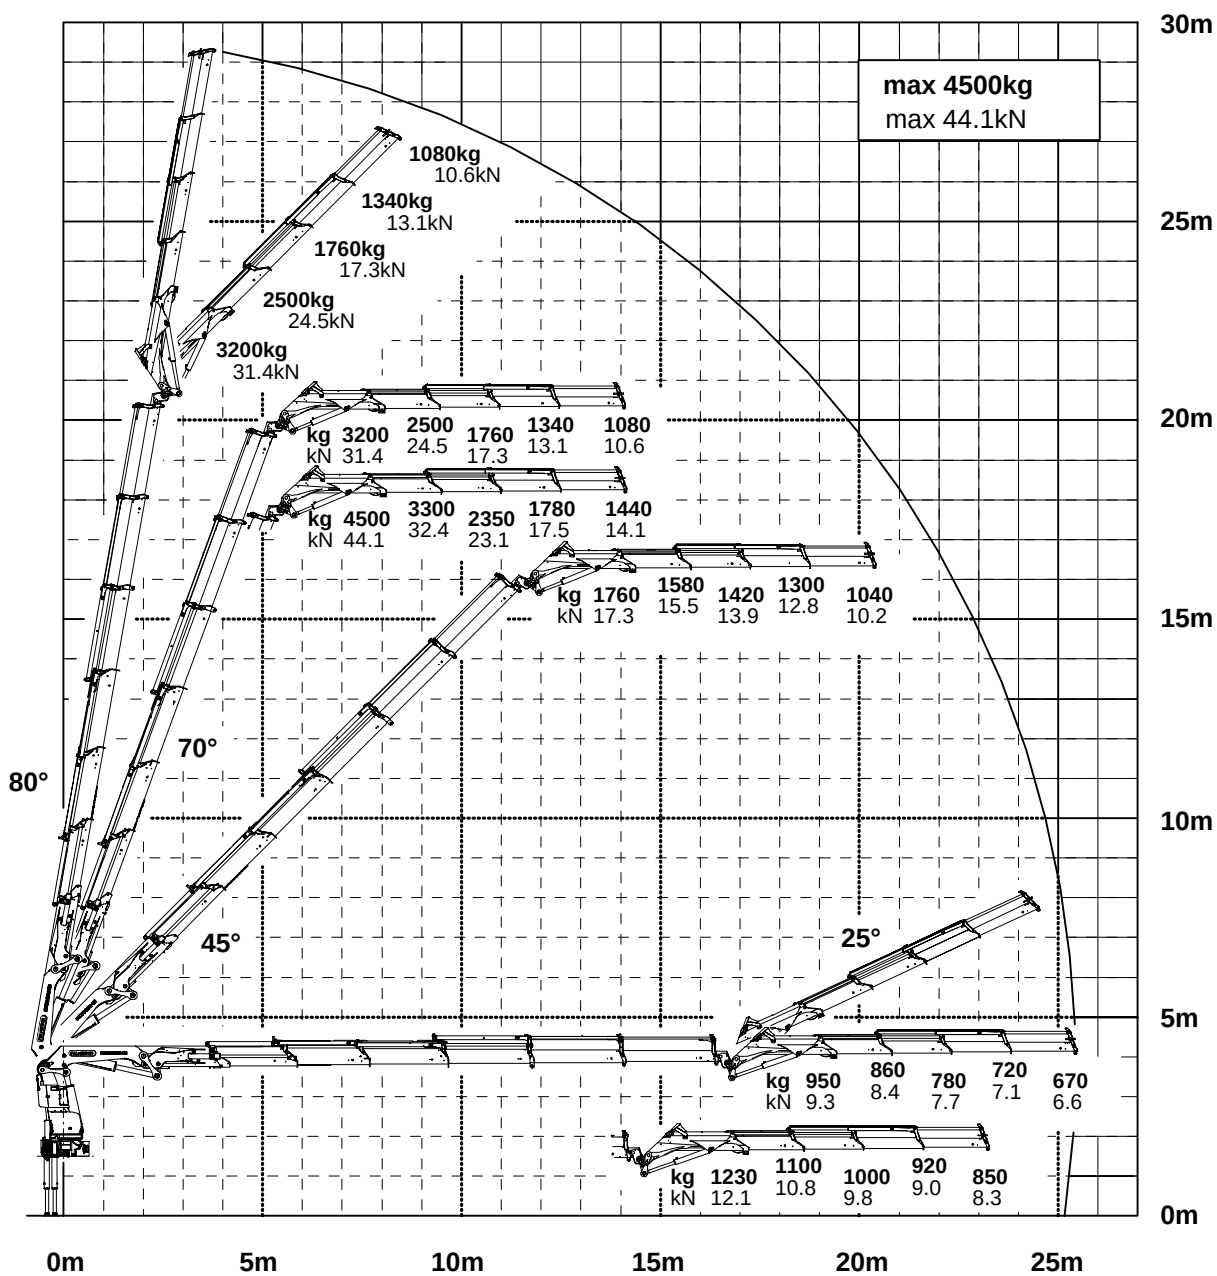


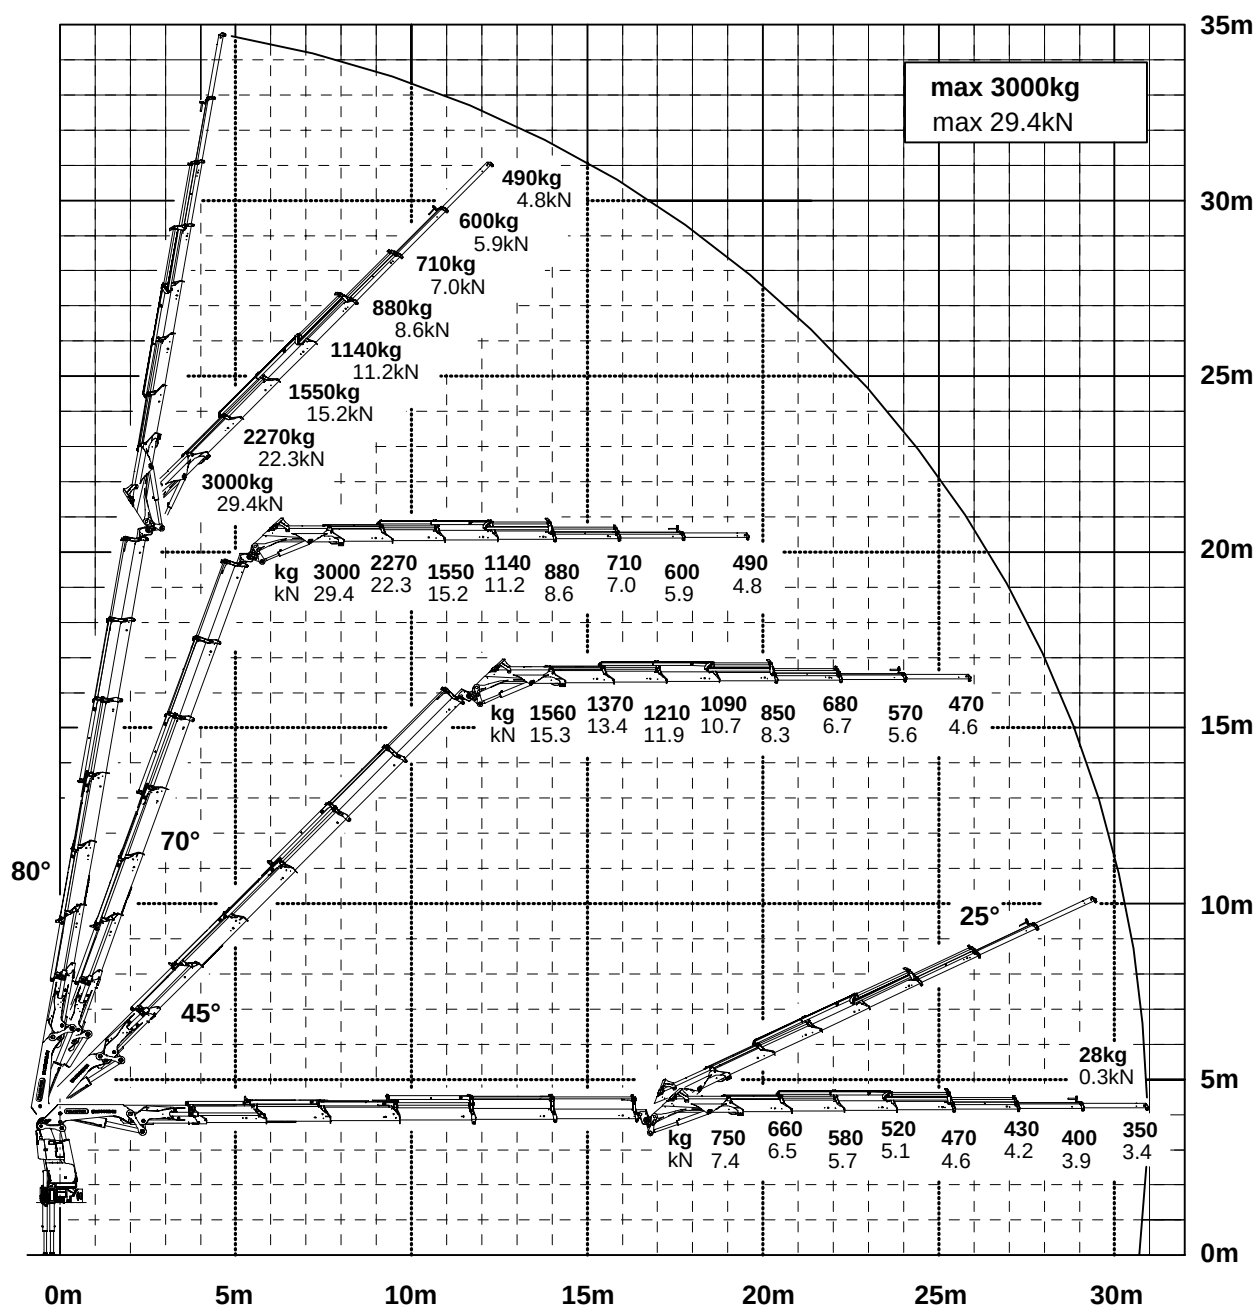

DPS^{plus}


Dual Power System

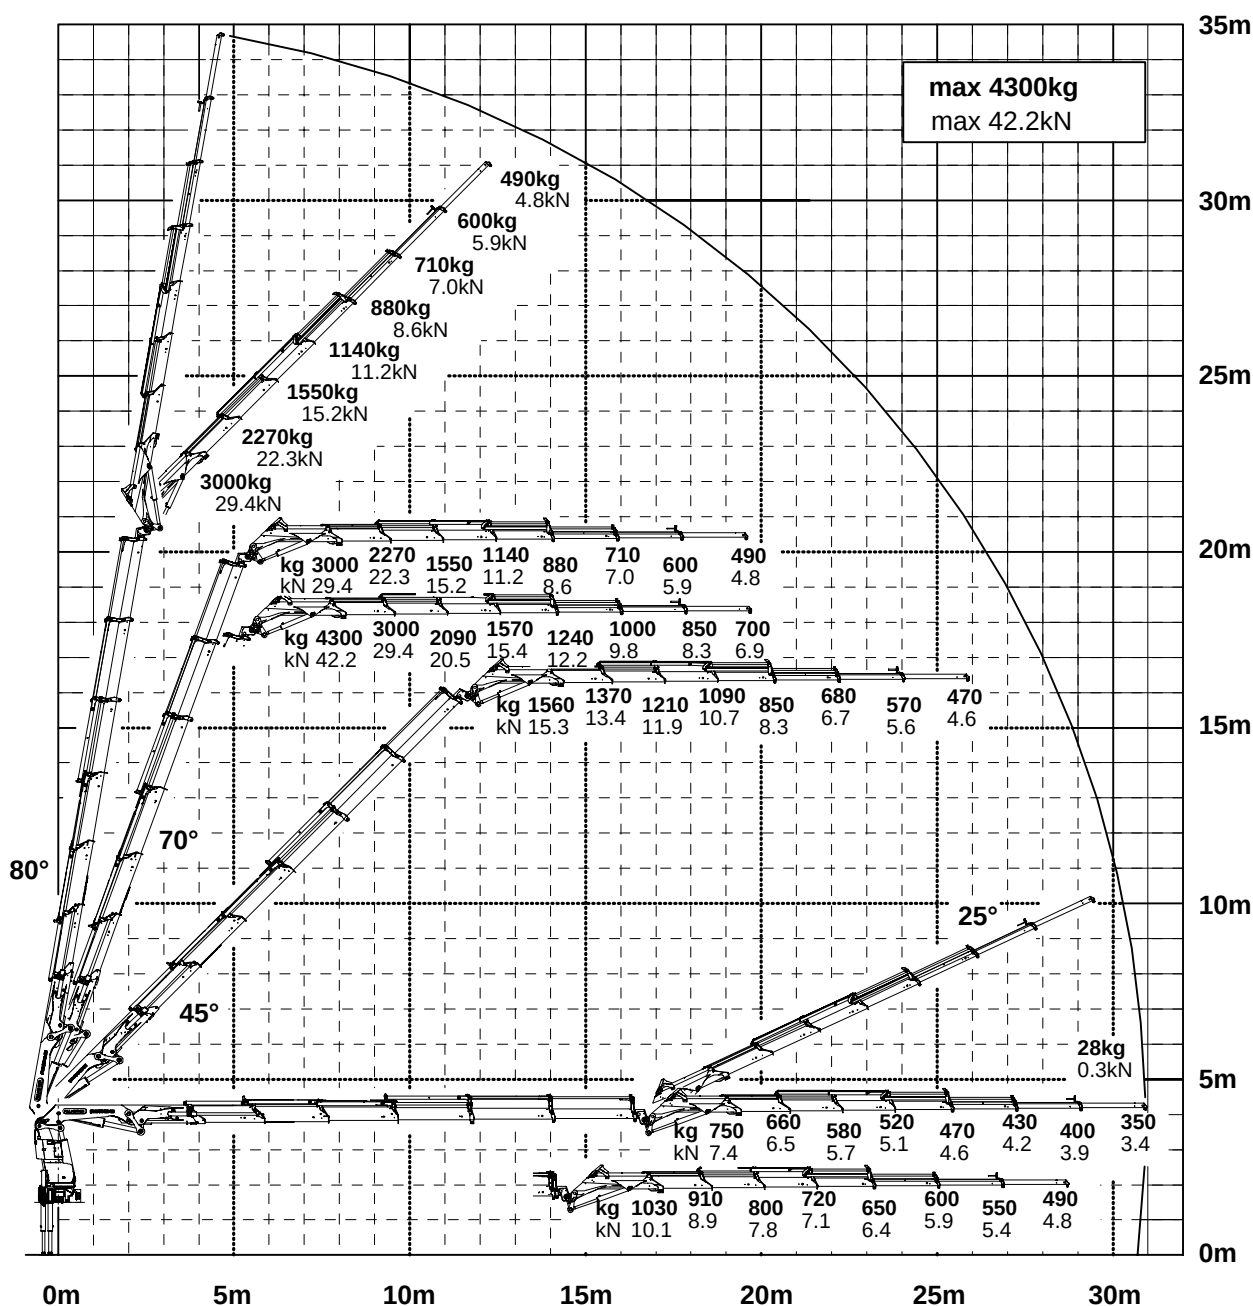


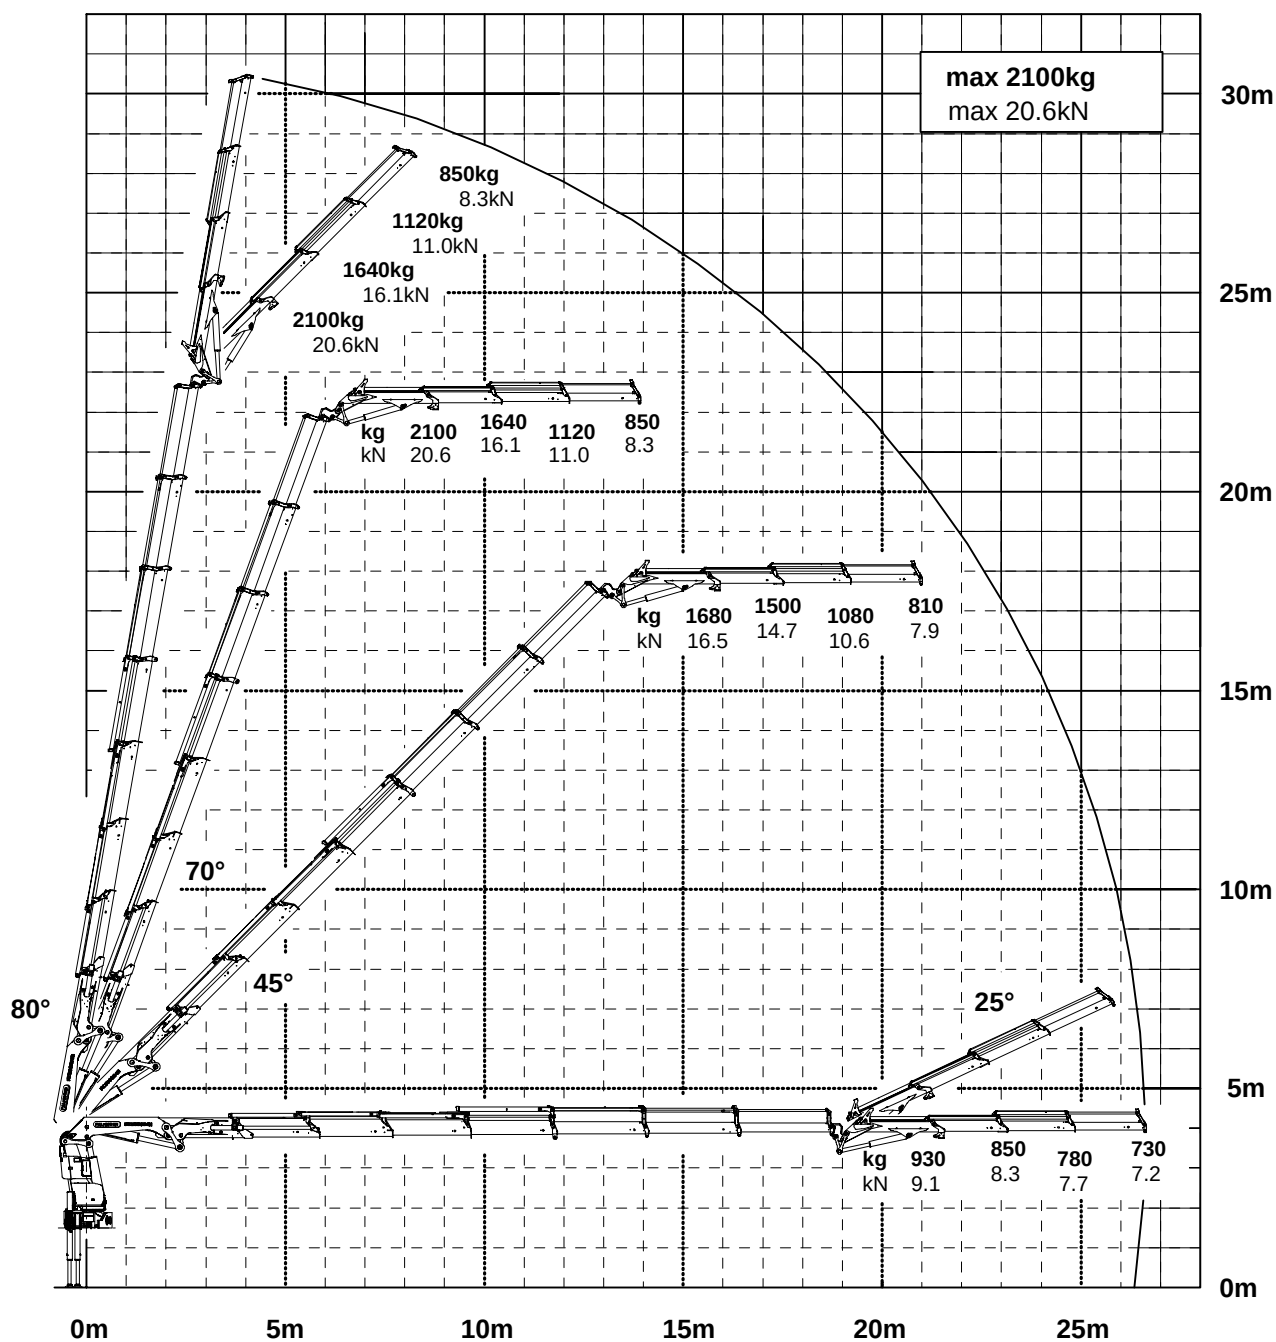

DPS^{plus}


Dual Power System


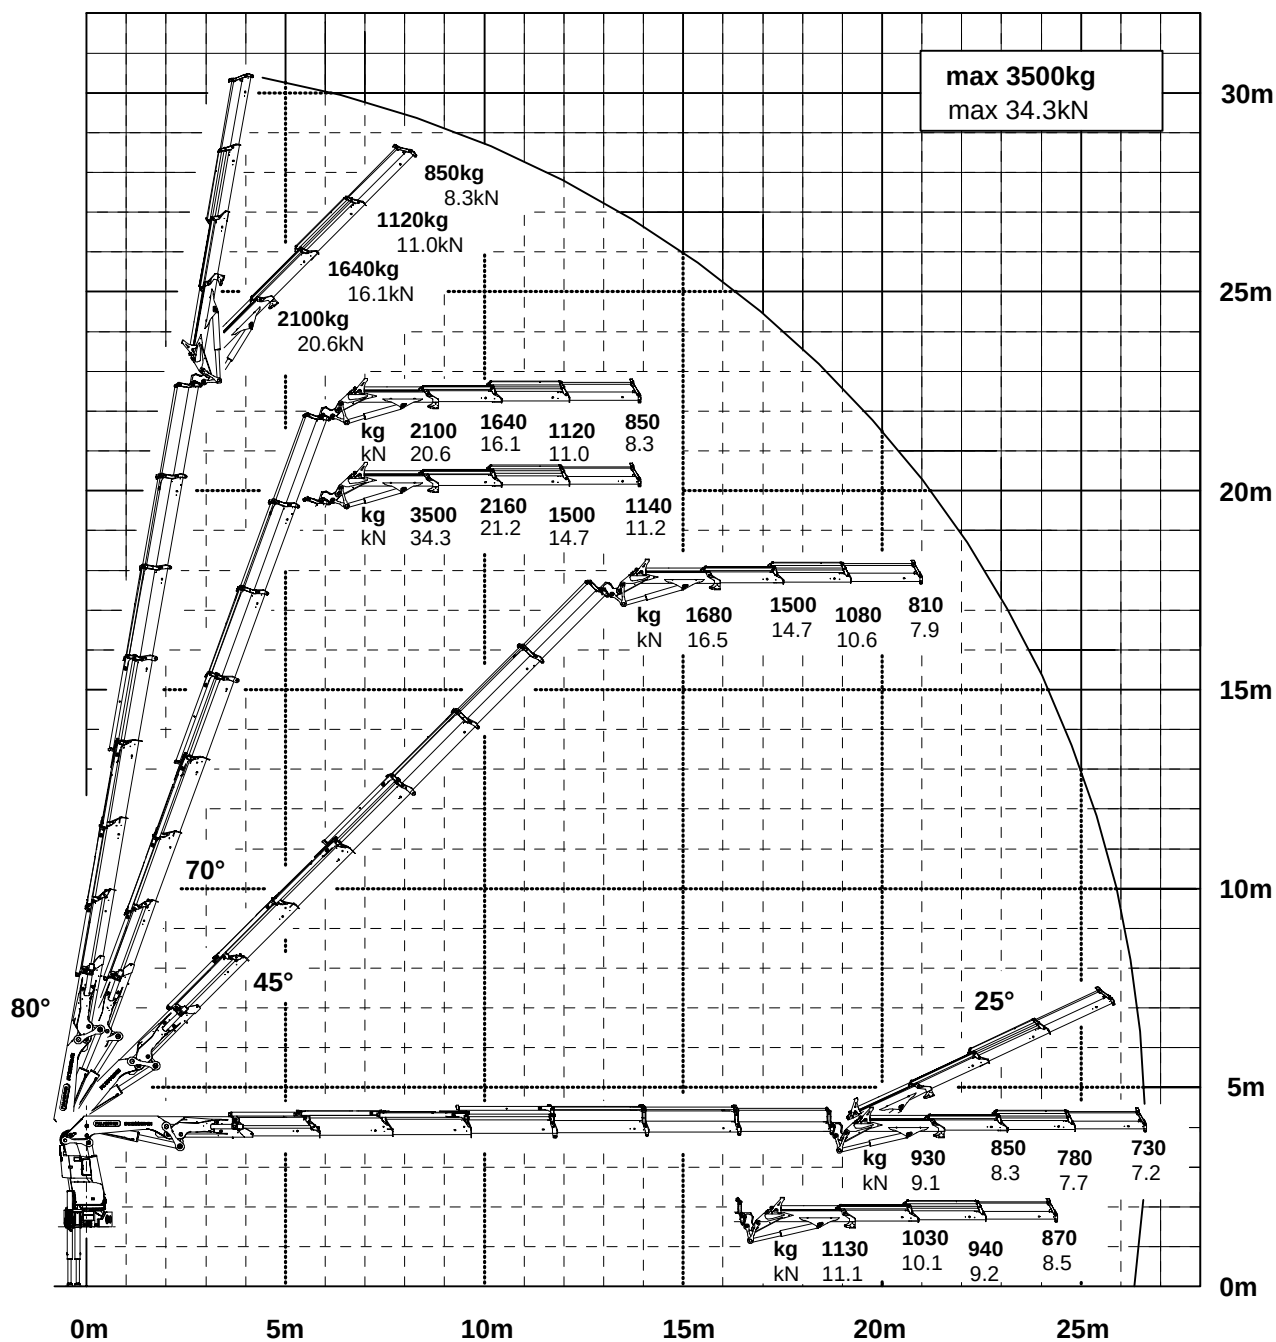


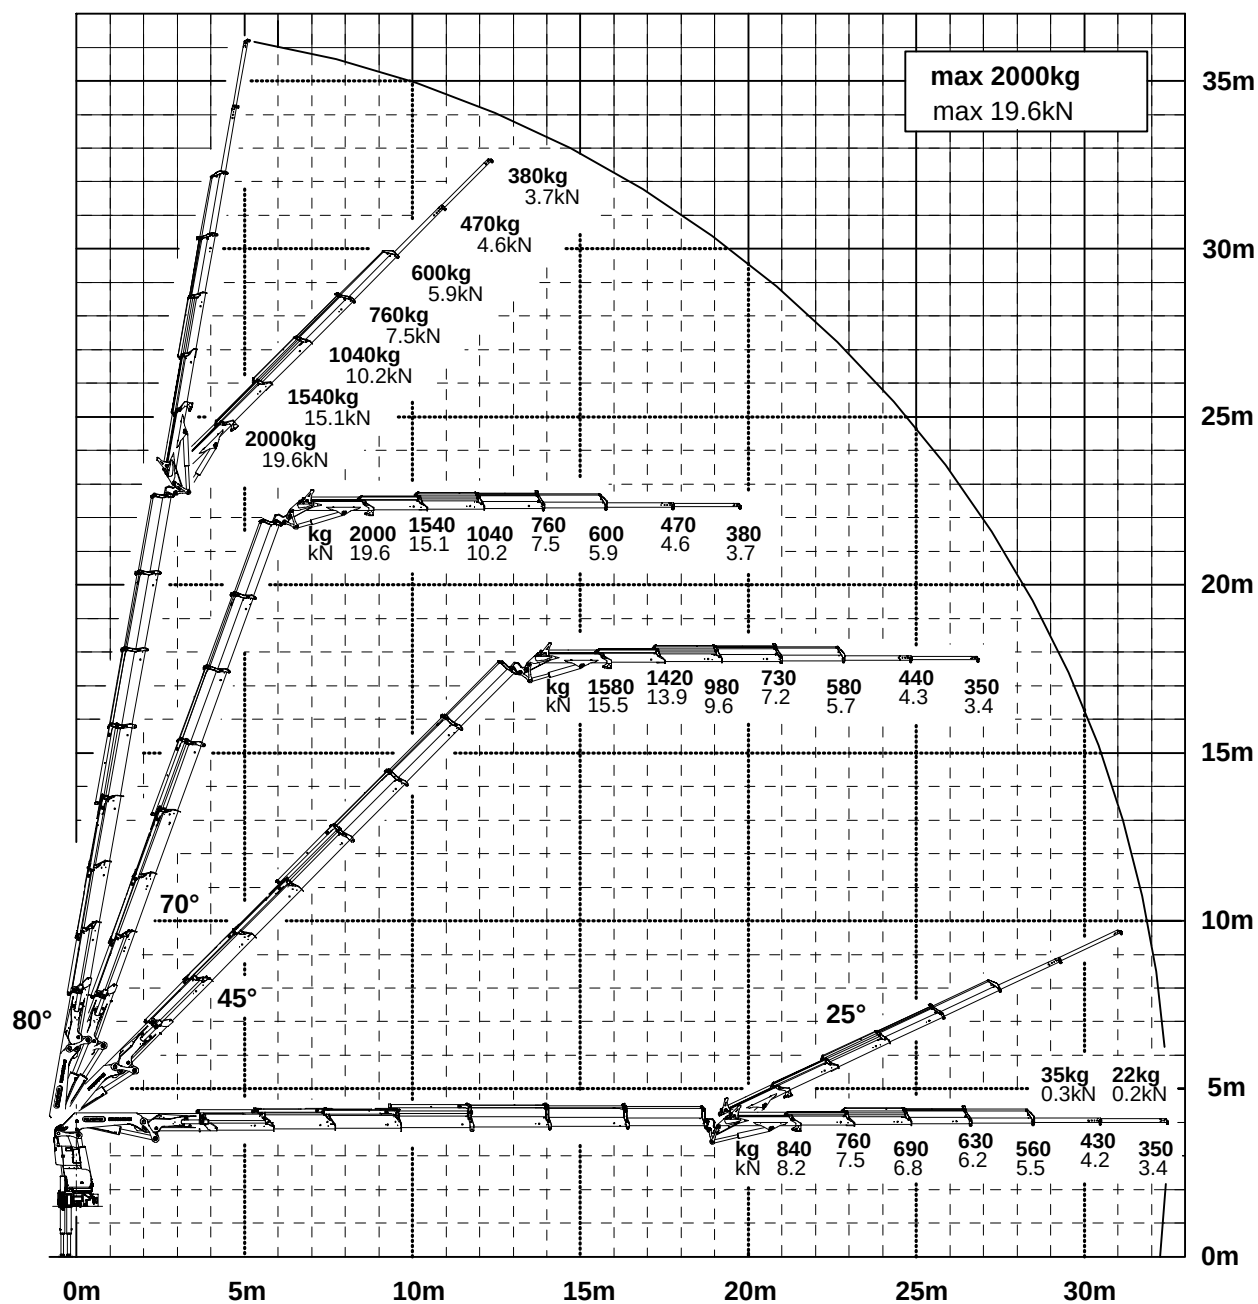


DPS^{plus}

Dual Power System

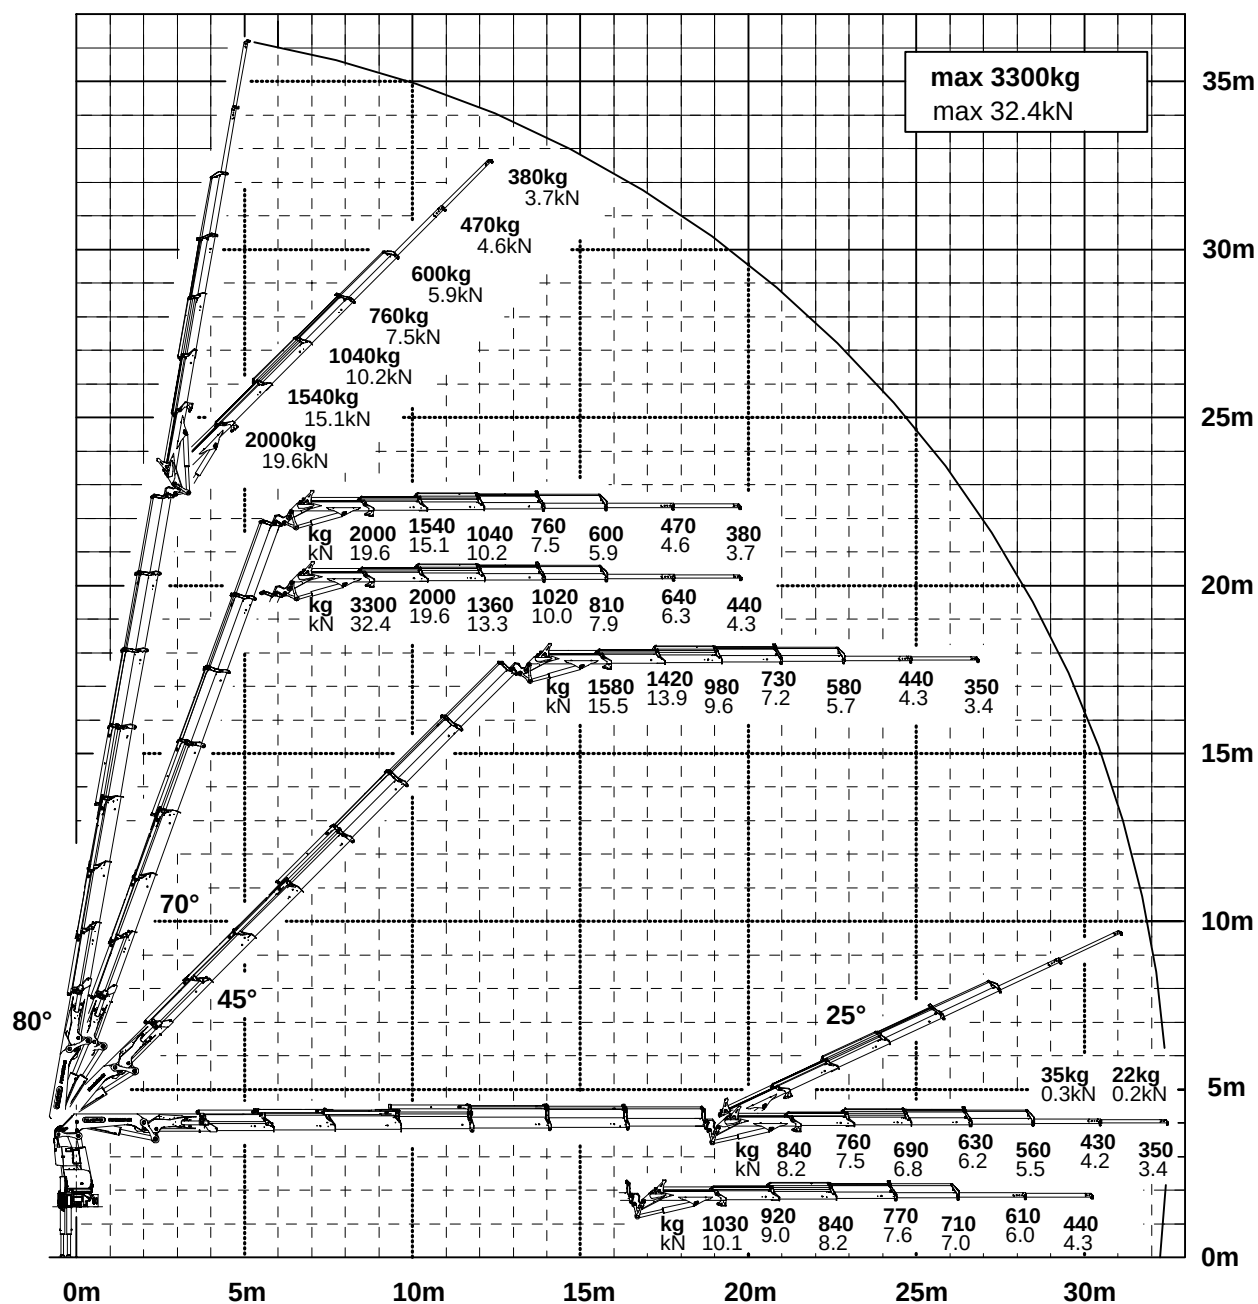

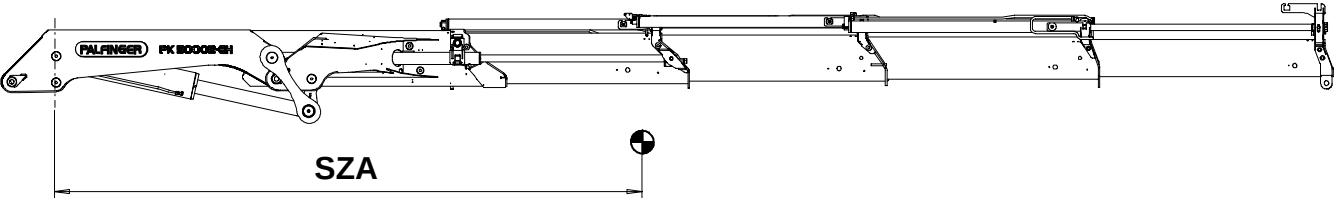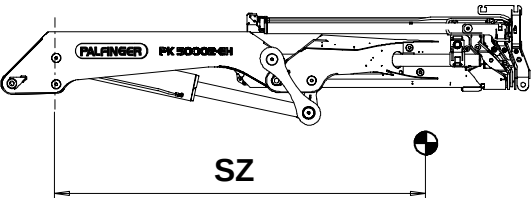PALFINGER CRANE (S411-SK-D) Modell Model Type PK 50002-EH		DTS411SHB/05 Kapitel Chapter Chapitre 0100 Seite Page Page 12/2008 Ausgabe Edition Edition	
		SZ 	SZA 
PK 50002-EH A	1745 kg 17.12 kN (3847 lbs)	2086 mm (82.13")	2811 mm (110.67")
PK 50002-EH B	2010 kg 19.72 kN (4431 lbs)	2204 mm (86.77")	3495 mm (137.60")
PK 50002-EH C	2285 kg 22.42 kN (5037 lbs)	2307 mm (90.83")	4289 mm (168.86")
PK 50002-EH D	2540 kg 24.92 kN (5600 lbs)	2386 mm (93.94")	5090 mm (200.39")
PK 50002-EH E	2765 kg 27.12 kN (6096 lbs)	2455 mm (96.65")	5868 mm (231.02")
PK 50002-EH F	2965 kg 29.09 kN (6537 lbs)	2509 mm (98.78")	6608 mm (260.16")
PK 50002-EH G	3145 kg 30.85 kN (6933 lbs)	2557 mm (100.67")	7319 mm (288.15")
PK 50002-EH G V1G	3198 kg 31.37 kN (7050 lbs)	2573 mm (101.30")	7561 mm (297.68")
PK 50002-EH G V2G	3238 kg 31.76 kN (7138 lbs)	2588 mm (101.89")	7705 mm (303.35")
 			
		R3X STZS3 1GETR	
		2400 kg 23.54 kN (5291 lbs)	

PK 50002-EH G V1G,V2G

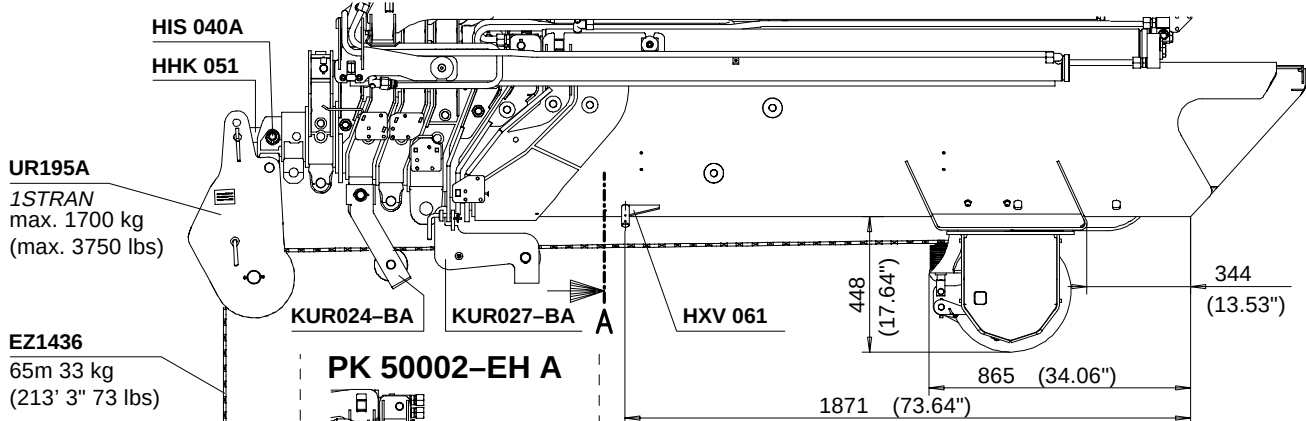


PK 50002-EH A

PK 50002-EH B,C

PK 50002-EH G


PK 50002-EH D,E,F

PK 50002-EH A,B,C

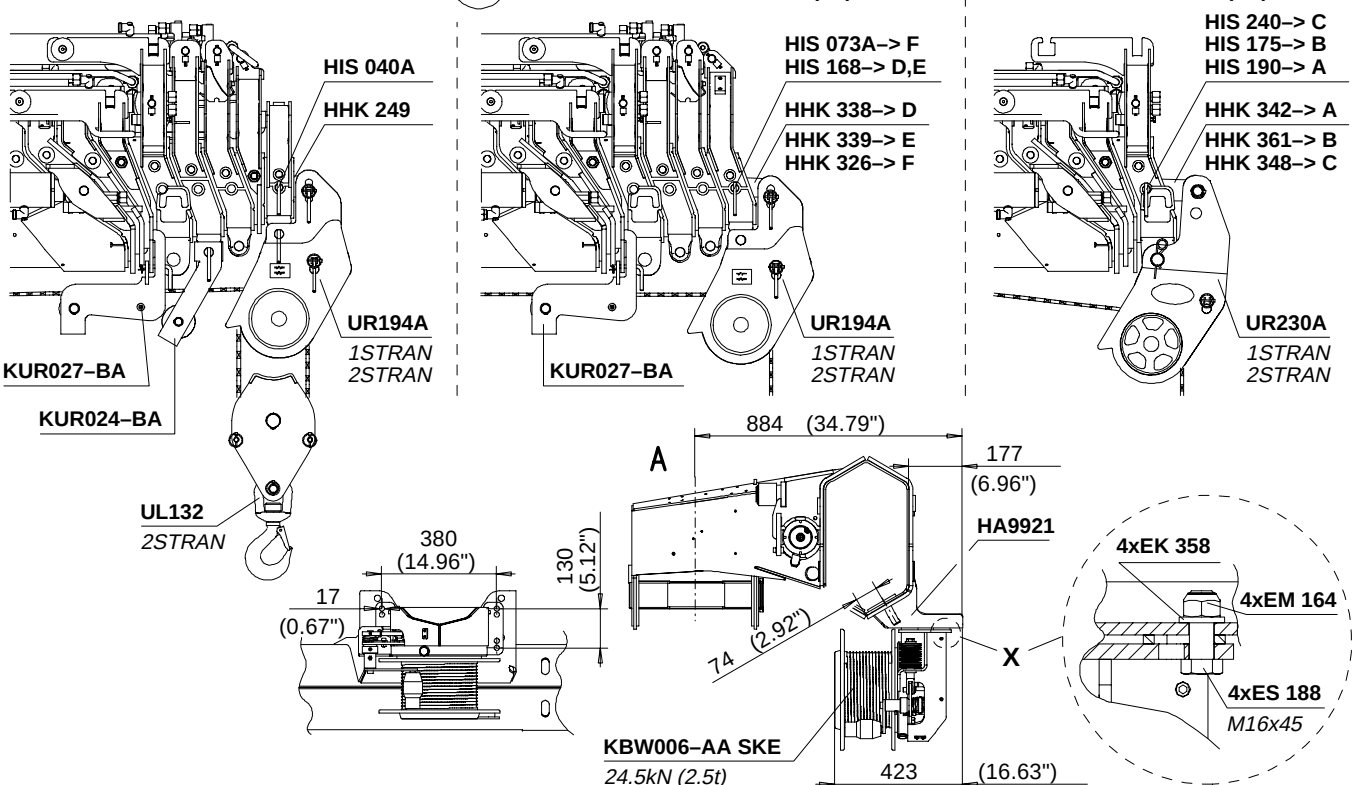


KBW006-AA SKE	KUR024-BA	KUR027-BA	HA9921	UR194A	UR195A	UR196	UR298	UR230A	UL120A	UL132	UL133	HHK ...
105 kg (231 lbs)	5 kg (11 lbs)	10 kg (22 lbs)	10 kg (22 lbs)	32 kg (71 lbs)	28 kg (62 lbs)	41 kg (90 lbs)	44 kg (97 lbs)	40 kg (88 lbs)	35 kg (77 lbs)	36 kg (79 lbs)	66 kg (146 lbs)	7 kg (15 lbs)


PK 50002-EH G V1G,V2G

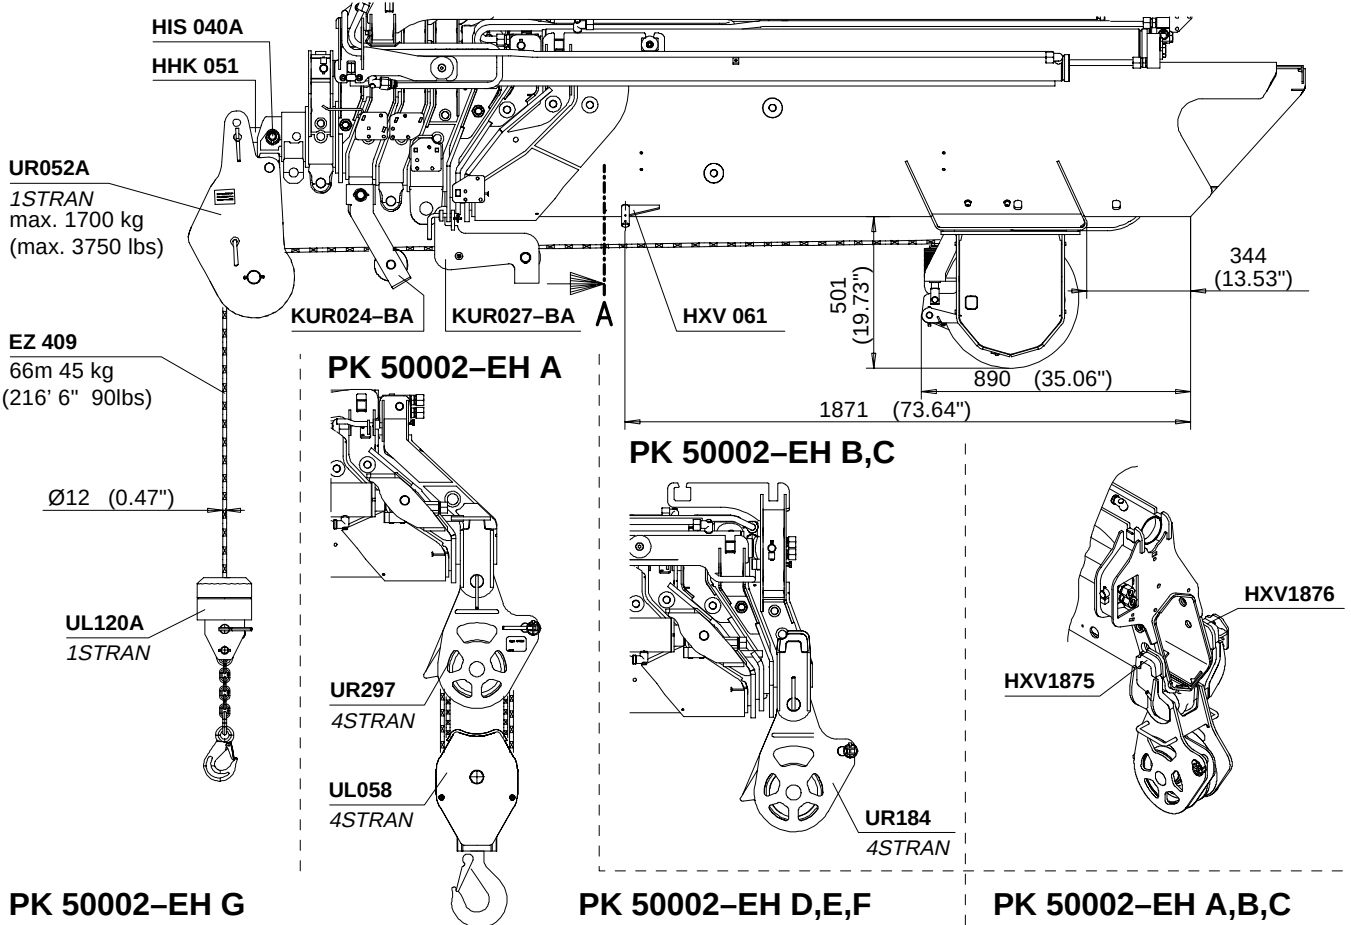



PK 50002-EH G

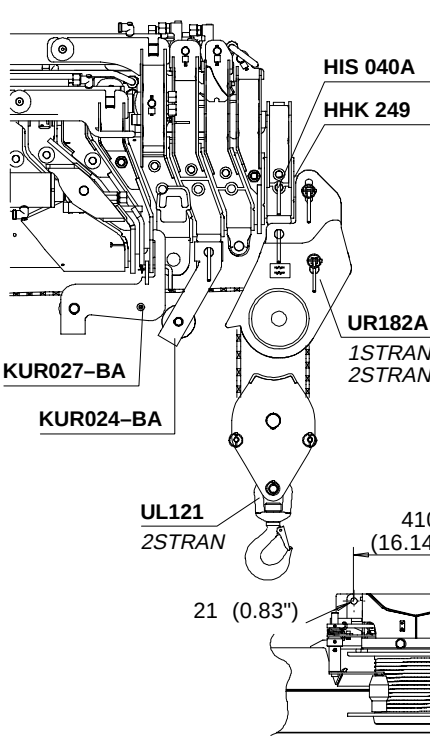

PK 50002-EH D,E,F

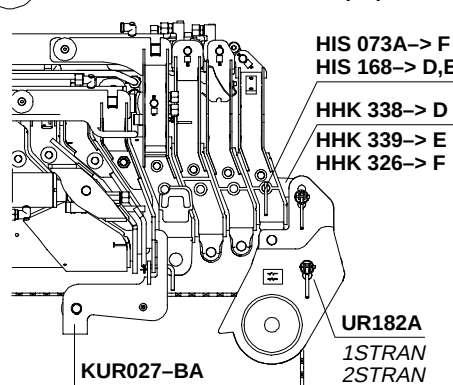


PK 50002-EH A,B,C

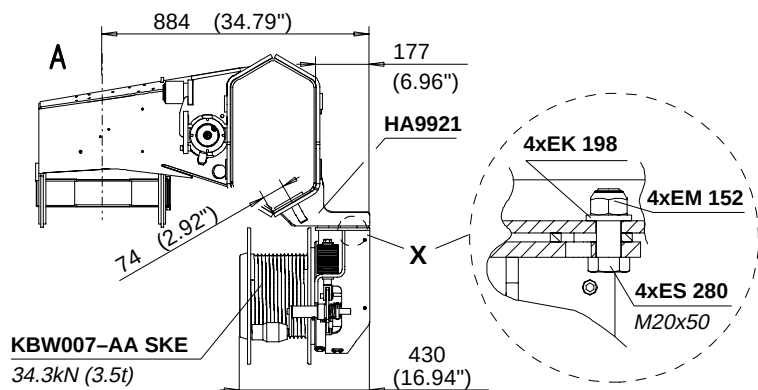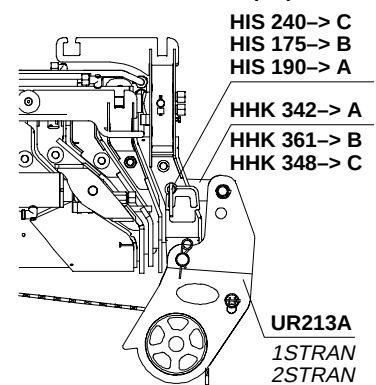


KBW007-AA SKE	KUR024-BA	KUR027-BA	HA9921	UR182A	UR052A	UR184	UR297	UR213A	UL120A	UL121	UL058	HHK ...
150 kg (331 lbs)	5 kg (11 lbs)	10 kg (22 lbs)	10 kg (22 lbs)	30 kg (66 lbs)	26 kg (57 lbs)	41 kg (90 lbs)	44 kg (97 lbs)	40 kg (88 lbs)	35 kg (77 lbs)	36 kg (79 lbs)	66 kg (146 lbs)	7 kg (15 lbs)


Konstruktionsänderungen vorbehalten, fertigungstechn. Toleranzen müssen berücksichtigt werden.
Subject to change, production tolerances have to be taken into account.
Sous réserve de modifications de conception, Les tolérances relatives à la technique de production doivent être prises en considération.

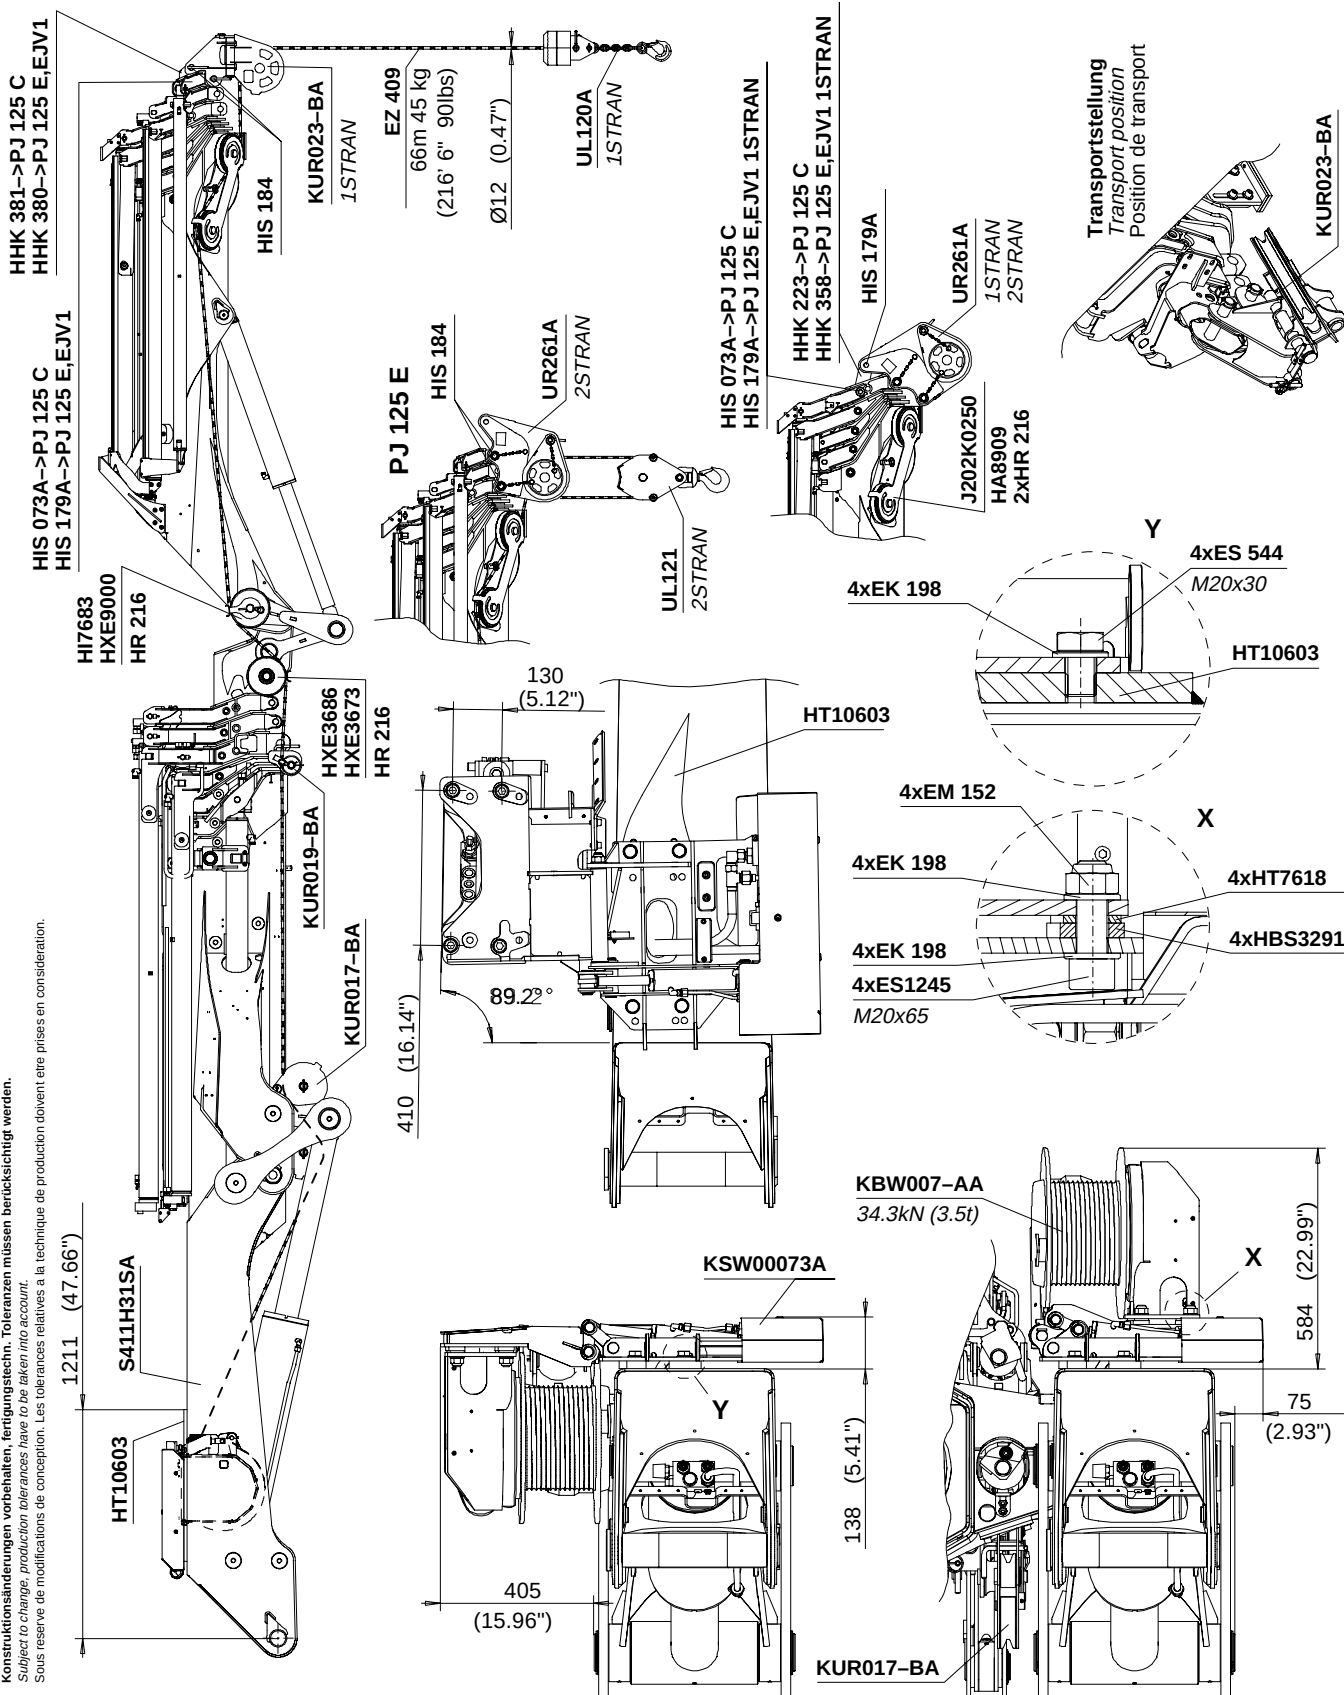

KBW007-AA SHEK	KSW0073A	J202K0250 HA8909	KUR017-BA	KUR019-BA	KUR023-BA	HT10603	HXE3673	HR 216	UR261A	UL120A	UL121	HHK ...
150 kg (331 lbs)	60 kg (132 lbs)	10 kg (22 lbs)	24 kg (53 lbs)	5 kg (11 lbs)	28 kg (62 lbs)	13 kg (29 lbs)	4 kg (9 lbs)	5 kg (11 lbs)	33 kg (73 lbs)	35 kg (77 lbs)	36 kg (79 lbs)	7 kg (15 lbs)

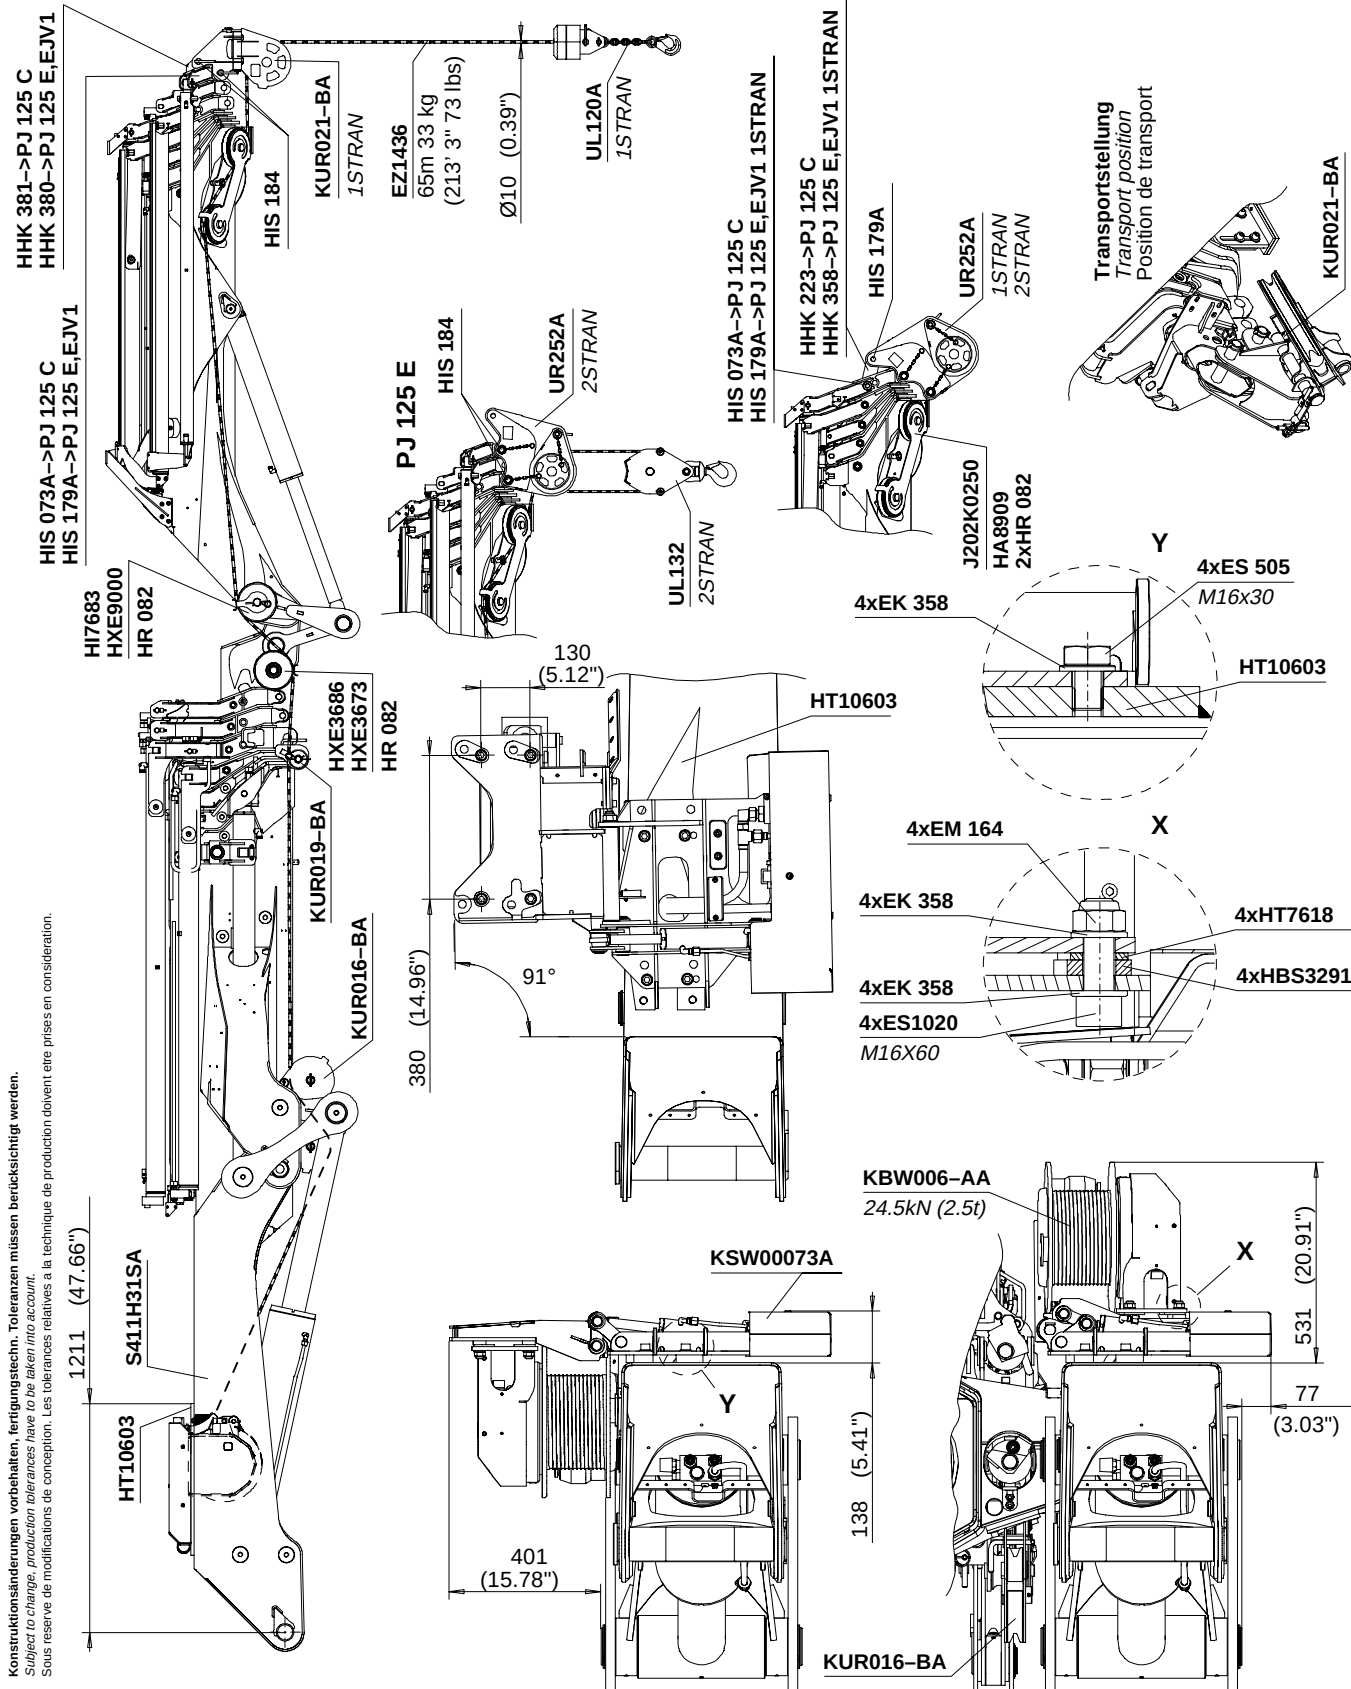

KBW006-AA SHEK	KSW0073A	J202K0250 HA8909	KUR016-BA	KUR019-BA	KUR021-BA	HT10603	HXE3673 HXE3683	HR 082	UR252A	UL120A	UL132	HHK ...
105 kg (231 lbs)	60 kg (132 lbs)	10 kg (22 lbs)	24 kg (53 lbs)	5 kg (11 lbs)	21 kg (46 lbs)	13 kg (29 lbs)	5 kg (11 lbs)	5 kg (11 lbs)	27 kg (60 lbs)	35 kg (77 lbs)	36 kg (79 lbs)	7 kg (15 lbs)

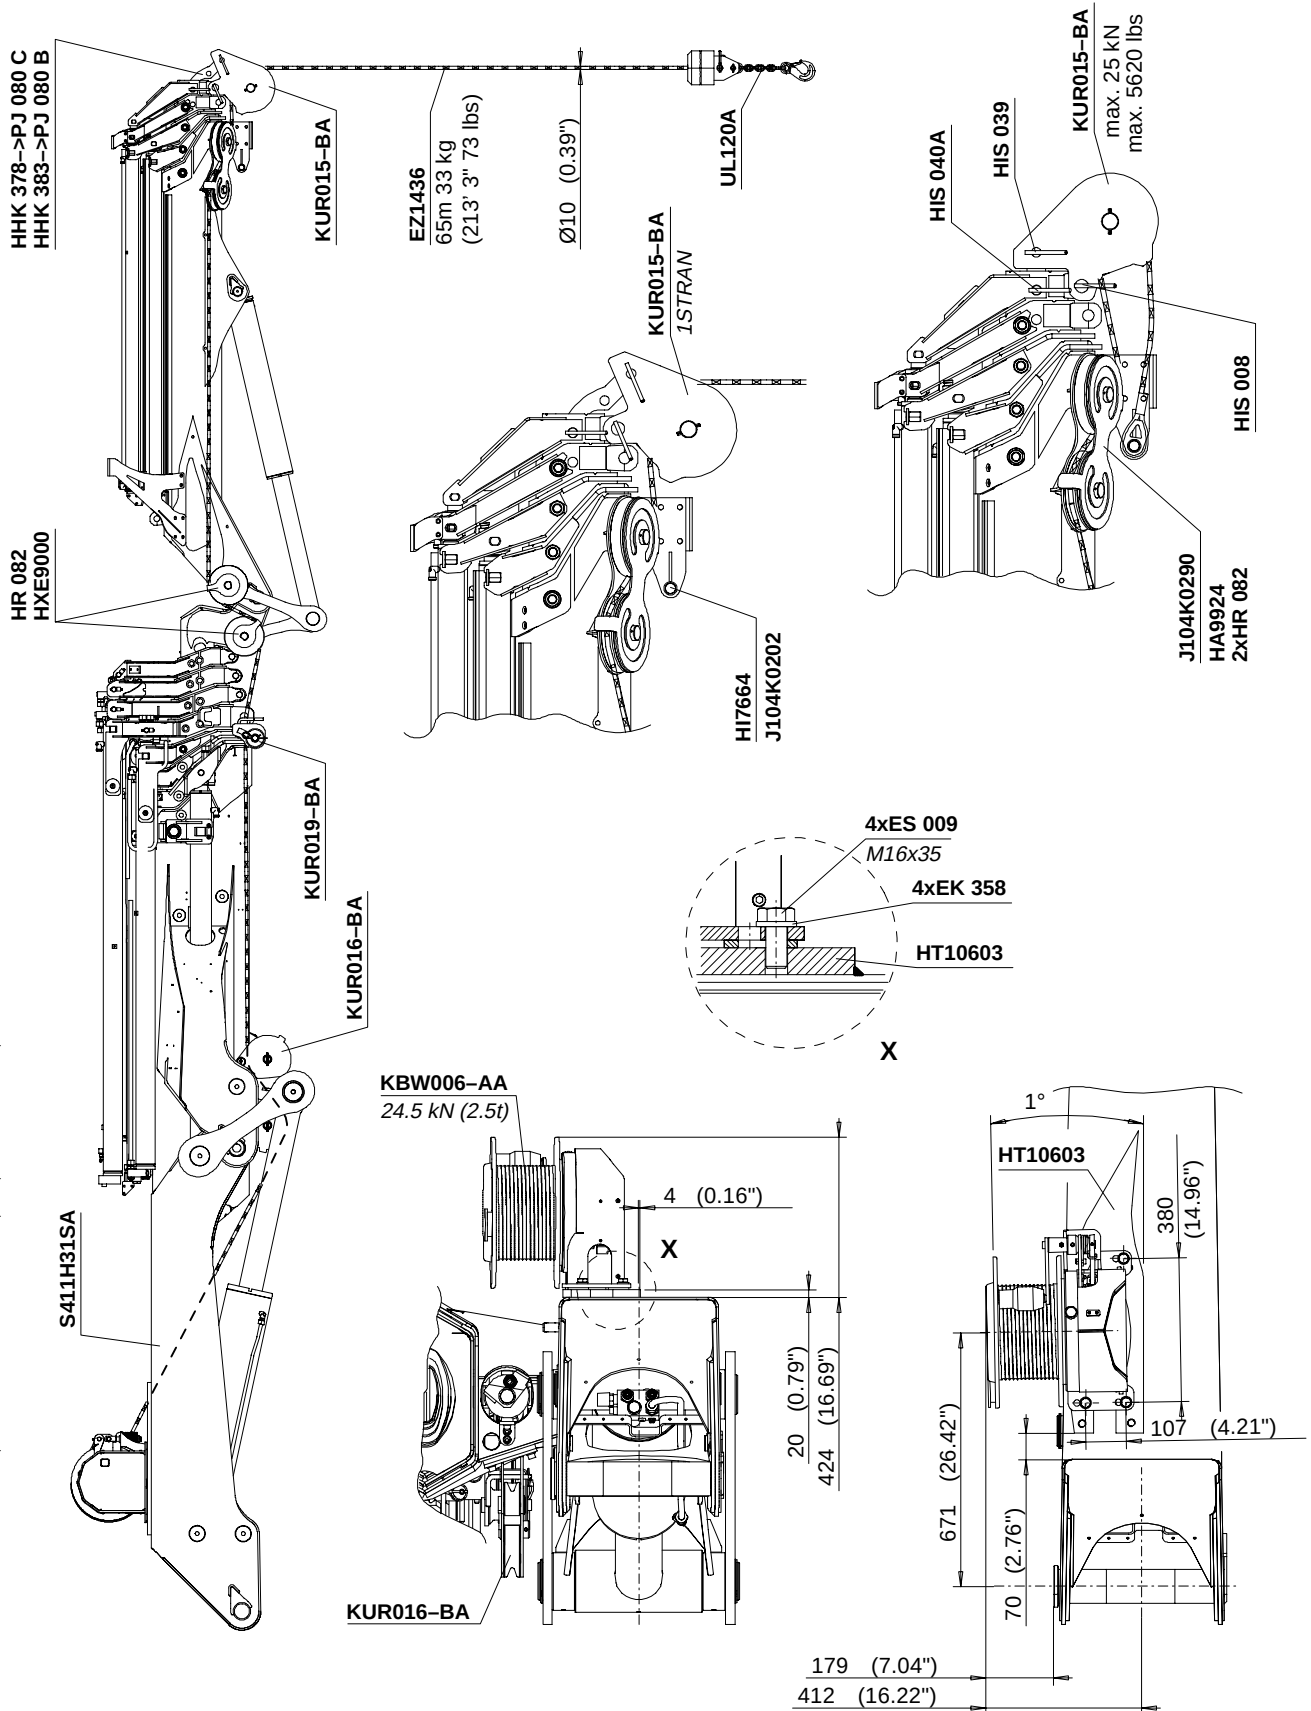

Konstruktionsänderungen vorbehalten, fertigungstechn. Toleranzen müssen berücksichtigt werden.
Subject to change, production tolerances have to be taken into account.
Sous réserve de modifications de conception, Les tolérances relatives à la technique de production doivent être prises en considération.

KBW006-AA SHE	HT10603	KUR016-BA	KUR019-BA	KUR015-BA	HR 082	J104K0290 HA9924	HI7664 J104K0202	UL120A	HHK ...
105 kg (231 lbs)	13 kg (29 lbs)	24 kg (53 lbs)	5 kg (11 lbs)	12 kg (26 lbs)	5 kg (11 lbs)	9 kg (20 lbs)	4 kg (9 lbs)	35 kg (77 lbs)	7 kg (15 lbs)